


Prepared For:
 DEKALB COUNTY, GEORGIA
 3043 Warren Road
 Decatur, GA 30034-
 (404)244 - 4200
 Reference ID: N/A

Presented By:
 RUSH TRUCK CENTERS OF GA
 Kurt Hohlstein
 2560 MORELAND AVE SE
 ATLANTA GA 30315 -
 (404)622-1921

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

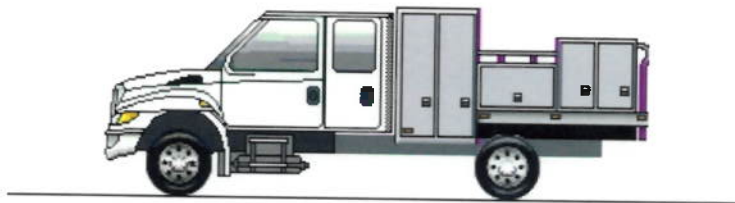

Model Profile
 2027 CV515 SFA (CV515)

AXLE CONFIG:	4X2
APPLICATION:	Service Body
MISSION:	Requested GVWR: 19500. Calc. GVWR: 19500. Calc. GCWR: 26000 Calc. Start / Grade Ability: 44.12% / 4.04% @ 55 MPH Calc. Geared Speed: 102.5 MPH
DIMENSION:	Wheelbase: 175.00, CA: 59.80, Axle to Frame: 49.00
ENGINE, DIESEL:	{International 6.6} EPA 2024, 350HP @ 2500 RPM, 750 lb-ft Torque @ 1400 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 1700 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 19,500-lb GVW and 26,000-lb GCW Max, On/Off Highway
AXLE, FRONT NON-DRIVING:	{Dana Spicer D-800N} I-Beam Type, 7,000-lb Capacity
AXLE, REAR, SINGLE:	{Dana Spicer S14-110} Single Reduction, 13,500-lb Capacity, 190 Wheel Ends Gear Ratio: 4.30
CAB:	Conventional 6-Man Crew Cab
TIRE, FRONT:	(2) 225/70R19.5 Load Range G HSR 5 (CONTINENTAL), 647 rev/mile, 87 MPH, All-Position
TIRE, REAR:	(4) 225/70R19.5 Load Range G HSR 5 (CONTINENTAL), 647 rev/mile, 87 MPH, All-Position
SUSPENSION, REAR, SINGLE:	13,500-lb Capacity, Vari-Rate Springs
PAINT:	Cab schematic 100CX Location 1: 9219, Winter White (Std) Chassis schematic N/A

Vehicle Specifications
2027 CV515 SFA (CV515)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
CV51500	Base Chassis, Model CV515 SFA with 175.00 Wheelbase, 59.80 CA, and 49.00 Axle to Frame.	4821/2936	7757
1570	TOW HOOK, FRONT (2) Frame Mounted	13/-1	12
1ANA	AXLE CONFIGURATION 4x2	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CGH	FRAME RAILS High Strength Low Alloy Steel (50,000 PSI Yield), Straight Top Flange with Contoured Bottom, Height Transitions from 7.375" (187.325mm) to 9.125" (231.775mm) to 7.625" (193.675mm); Width: 3.079" (78.21mm); Thickness: 0.3125" (7.94mm); 383.3" (9735.8mm) Max OAL	13/10	23
1LNZ	BUMPER, FRONT Contoured, Steel, Chrome Plated, for CV and RE Bus	0/0	0
1WEB	WHEELBASE RANGE 128" (325cm) Through and Including 183" (465cm)	0/0	0
2AJK	AXLE, FRONT NON-DRIVING {Dana Spicer D-800N} I-Beam Type, 7,000-lb Capacity	0/0	0
3AGN	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 7,000-lb Capacity, with Shock Absorbers	24/0	24
4240	BRAKE SYSTEM, HYDRAULIC {Bosch} Split System, with Four Channel ABS, Traction Control, Electronic Stability Control, Hydromax Brake Booster with High Speed Master Cylinder and Trailer Sway Control	0/0	0
4EVD	DUST SHIELDS, FRONT BRAKE for Hydraulic Brakes	0/0	0
4EVE	DUST SHIELDS, REAR BRAKE for Hydraulic Brakes	0/0	0
4GBJ	BRAKE, PARKING {Bosch} DSSA Type, 12" x 3"; for Hydraulic Brake Chassis; Foot Operated in Cab; Differential Mounted	0/0	0
4XCU	BRAKES, FRONT {Meritor Quadraulic} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 8,000-lb Capacity	0/0	0
4XCV	BRAKES, REAR {Meritor Quadraulic} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 15,500-lb Capacity per Axle	0/0	0
5708	STEERING COLUMN Tilting	0/0	0
5CBG	STEERING WHEEL 4-Spoke; 15" Dia., Black	0/0	0
5PSS	STEERING GEAR {Bosch S2 8014 Plus} Power	0/0	0
6DGA	DRIVELINE SYSTEM {Dana Spicer} SPL100, for 4x2/6x2	0/0	0
7BMV	EXHAUST SYSTEM Horizontal Dual Aftertreatment System, Frame Mounted Under Right Rail, for Single Horizontal Tail Pipe	0/0	0
7SDS	ENGINE EXHAUST BRAKE for International 6.6 Engine	0/0	0
7XAA	MANUAL REGEN Capability	0/0	0
8002	ELECTRICAL SYSTEM 12-Volt for CV Model	0/0	0
	<u>Includes</u> : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : PARKING LIGHT PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		

Vehicle Specifications
2027 CV515 SFA (CV515)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: TURN SIGNALS, FRONT Includes Reflectors and Solid State Flashers; Flush Mounted		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature, Integral with Turn Signal Lever		
8540	HORN, ELECTRIC (2) Trumpet Style	1/0	1
8GJA	ALTERNATOR {Denso SC2} Brush Type, 12 Volt, 150 Amp Capacity	0/0	0
8HBW	TRAILER BRAKE CONTROL Integrated	12/7	19
8HXV	BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Crew Cab at Left Frame; Includes One Sealed Connector for Separate Ground/Backup/Left and Right Hand Turn, Left and Right Hand Tail/Stop/Accessory Power and Combined for Left and Right Hand Stop/Turn	0/3	3
8MWA	BATTERY SYSTEM {VARTA} Maintenance-Free, (2) 12-Volt 1300CCA Total, Top Threaded Stud	0/0	0
8RNU	SPEAKERS (6)	2/0	2
8RNY	CAMERA SYSTEM, REAR VIEW Includes Camera, Mounting, Wiring and Interface to the Monitor, for the Back-up Camera System	0/2	2
8RRT	RADIO AM/FM/Clock/Bluetooth/USB Input/Auxiliary Input/Apple Carplay/Android Auto, Seek/Scan, with 7" Color Touch Panel Display	1/0	1
8TRA	TRAILER CONNECTION SOCKET Mounted at Rear of Frame, Wired for Turn Signals Combined with Stop, Compatible with Trailers with Combined Stop, Tail, Turn Lamps	-3/9	6
8TUL	STOP, TURN, TAIL & B/U LIGHTS Multi-Function, Sealed, Incandescent Stop, Turn and Tail Lights, Backup Lights with Rear Reflex Reflector, Includes License Plate Light	0/0	0
8VVB	BATTERY BOX Steel, with Plastic Cover, 2 Battery Capacity, Parallel to Rail, 28" Wide, Mounted Left Side Under Cab	0/0	0
8XJN	HEADLIGHTS Halogen, Composite Aero Design, Black Trim Bezel, with Daytime Running Lights	0/0	0
8XJP	SWITCH, AUXILIARY 1 to 4 Latching Switches with 30-Amp Fuses	0/0	0
8XJV	CLEARANCE/MARKER LIGHTS (5) Amber LED Lights, Flush Mounted on Cab	0/0	0
8XJW	STARTING MOTOR 12 Volt	0/0	0
8XJX	POWER INVERTER 12 Volt DC to 110 Volt AC	2/0	2
9AAD	LOGOS EXTERIOR Omit Model Badges	0/0	0
9HBZ	GRILLE Molded in Dark Gray	0/0	0
9WAC	BUG SCREEN Mounted Behind Grille	0/0	0
9WAY	FRONT END Tilting, Fiberglass, with Three Piece Construction	0/0	0
9WBN	FENDER EXTENSIONS Painted	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10SLV	PROMOTIONAL PACKAGE Government Silver Package	0/0	0

Vehicle Specifications
2027 CV515 SFA (CV515)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle. <u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.	0/0	0
10WBS	KEYS - ALL ALIKE, ADDITIONAL 2 Keys	0/0	0
10XAW	GVWR WEIGHT CLASSIFICATION Class 5 (16,001-19,500 lbs)	0/0	0
12GAJ	ENGINE, DIESEL {International 6.6} EPA 2024, 350HP @ 2500 RPM, 750 lb-ft Torque @ 1400 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)	0/0	0
12TTM	FAN DRIVE Viscous Type, Screw On, Rear Tether, Electronically Controlled	0/0	0
12VGC	AIR CLEANER Single Element, with Water Separator	0/0	0
12VKH	EMISSION, CALENDAR YEAR {International 6.6} EPA, OBD and GHG Certified for Calendar Year 2026	0/0	0
12WGG	THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic Controlled, On/Off Switch Mounted on Dash, with Steering Wheel Button Control	0/0	0
12WUT	GOVERNOR Electronic Road Speed Type; with 70 MPH Default	0/0	0
12WZB	CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
12XCU	CARB EMISSION WARR COMPLIANCE for International 6.6 Engines	0/0	0
12XZD	RADIATOR Aluminum, 3-Row, Down Flow, Front to Back System, 730 SqIn Louvered, with 578 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler	0/0	0
13BAJ	TRANSMISSION, AUTOMATIC {Allison 1700 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 19,500-lb GVW and 26,000-lb GCW Max, On/Off Highway	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYY	SHIFT CONTROL PARAMETERS {Allison} 1000 or 2000 Series Transmissions, Performance Programming	0/0	0
13XAK	PTO LOCATION Customer Intends to Install PTO at Right Side of Transmission	0/0	0
14ACW	AXLE, REAR, SINGLE {Dana Spicer S14-110} Single Reduction, 13,500-lb Capacity, 190 Wheel Ends . Gear Ratio: 4.30	0/0	0
14SAC	SUSPENSION, REAR, SINGLE 13,500-lb Capacity, Vari-Rate Springs	0/0	0
14WAP	SHOCK ABSORBERS, REAR (2)	0/50	50
15SZN	FUEL TANK Top Draw, Plastic, Rectangular, 17" Tank Depth, 40 US Gal (151L), Includes Auxiliary Draw Port and Fuel Filler Assembly, Mounted Between Frame Rails and Behind Rear Axle	0/0	0
15WDZ	DEF TANK 6.75 US Gal (26L) Capacity, Frame Mounted Outside Right Rail, Under Cab	0/0	0
16196	CAB Conventional 6-Man Crew Cab	259/307	566

Vehicle Specifications
2027 CV515 SFA (CV515)

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	<u>Includes</u> : CAB DOOR LOCKS Power Door Locks All Doors : DOME LIGHT, CAB with OFF/DOOR/ON Settings; Located in Overhead Console : READING LIGHT, CAB Located in Overhead Console : STEP (4) One Step Per Door : STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door		
16ACB	MIRROR, INSIDE REAR VIEW with Manual Tilt	0/0	0
16BBA	GLASS, ALL WINDOWS Solar Absorbing, Tint	0/0	0
16CEM	COLOR, INTERIOR Dark Ash	0/0	0
16HCT	GAUGE CLUSTER English Speedometer, Includes English Odometer; Includes 3.5" Monochromatic Display with Personalization, Warning Messages and Vehicle Information	0/0	0
16KZC	SEAT, REAR BENCH, Vinyl	0/0	0
16KZL	SEAT, DRIVER High Back with Integral Headrest, 10-Way Power Adjustable, Vinyl, Power Lumbar	0/0	0
16LVR	SEAT, TWO-MAN PASSENGER High Back with Integral Headrest in Outboard Position, Center Fold-Down Armrest with Storage, Vinyl, with Recline	0/0	0
16SPT	MIRRORS (2) Manual Folding and Extending, Power Adjust, Heated, Turn Signal Indicator Located in Mirror, Bright Heads and Arms, for 96" Load Width	5/0	5
16VKD	CAB INTERIOR TRIM Classic, for Crew Cab	0/0	0
	<u>Includes</u> : SUN VISOR (2) Vinyl		
16XAL	KEYLESS ENTRY SYSTEM REMOTE with Panic Alarm and Horn Beep Lock Confirmation, Includes Two Key Fob Transmitters	0/0	0
16XCP	AIR BAG, FRONT, DRIVER SIDE	0/0	0
16XCR	AIR BAG, FRONT, PASSENGER SIDE	0/0	0
16XCT	WINDOW, POWER (4) in Left and Right Doors, Front and Rear	0/0	0
16XDE	AIR BAG, SIDE, DRIVER Seat Mounted, Outboard Side-Impact Airbag	0/0	0
16XDG	AIR BAG, SIDE, PASSENGER Seat Mounted, Outboard Side-Impact Airbag	0/0	0
16XDH	AIR BAG, SIDE CURTAIN Roof Mounted, for Front and Rear Outboard Seating Positions for Driver and Passenger Sides	0/0	0
16XZA	AIR CONDITIONER with Heater, Single Zone	0/0	0
27DTX	WHEELS, FRONT {Accuride 50180} DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/0	0
28DTX	WHEELS, REAR {Accuride 50180} DUAL DISC; 19.5x6.75 Rims, Powder Coat Steel, 4-Hand Hole, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/0	0
7779445452	(2) TIRE, FRONT 225/70R19.5 Load Range G HSR 5 (CONTINENTAL), 647 rev/mile, 87 MPH, All-Position	0/0	0
7779445452	(4) TIRE, REAR 225/70R19.5 Load Range G HSR 5 (CONTINENTAL), 647 rev/mile, 87 MPH, All-Position	0/0	0

Services Section:

Vehicle Specifications
2027 CV515 SFA (CV515)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u>	<u>Tot Wt</u>
		(lbs)	(lbs)
40131	WARRANTY Standard for CV515, Effective with Vehicles Built December 3, 2018 or Later, CTS-3000A	0/0	0
	Total Component Weight:	5150/3323	8473
		(lbs)	(lbs)
		(lbs)	(lbs)

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.



70 Pike Industrial Way
Milner, GA 30257

Name / Address				Additional Info	
Rush Truck Center - Atlanta 2560 Moreland Ave. Atlanta, GA 30315				Kurt Hohlstein DeKalb County CV	
Rep	P.O. No.	Approx Lead Time	Terms	Make / Model	C/A & SRW-DRW
BRAD		25-30 weeks	Net 30	INT CV	60,DRW
Qty	Description				
1	Warner Service Body WS108-M-DW-U-SP Specs Attached				
1	2,000 Watt Pure Sine Inverter (2,000W Continuous / 4,000W Surge) 2 GFCI Outlets (1 USB Outlet) Remote Compatible (Not Included) PWRI200012120S Location: Cab Under Back Seat				
1	Hand Tool Rack Cargo Area P/S Front Holds 8 pcs.				
1	12" Work bumper with Vise mount on P/S (no Vise)				
1	2" Heavy Duty Welded Receiver Hitch 7-Way RV Plug Weight Rating: 16,000 lbs.				
1	Flexible Rubber Step with 12" x 4.75" Tread 11" Rubber Straps BPC: 5231112 D/S approx 12" in from outside				
2	GFIUSE Receptacles on Front and Rear of Body for 2000 Watt Invertor				
1	Spray on Bed Liner: Compartment Tops & Load Area 9' Service Body				
Phone #	Fax #	E-mail	Web Site		
770-228-9974	770-228-7573	sales@kandkmfg.com	www.kandkmfg.com		

Estimates are valid for 7 days unless otherwise noted.



70 Pike Industrial Way
Milner, GA 30257

Name / Address				Additional Info	
Rush Truck Center - Atlanta 2560 Moreland Ave. Atlanta, GA 30315				Kurt Hohlstein DeKalb County CV	
Rep	P.O. No.	Approx Lead Time	Terms	Make / Model	C/A & SRW-DRW
BRAD		25-30 weeks	Net 30	INT CV	60,DRW
Qty	Description				
2	Whelen WX2240F - Traffic Advisor Amber Clear CCP9 - Control Point (amber traffic advisor, strobe function, and white work light bar) Mounted front and rear of mount on bulk head				
4	Whelen 5GAC Amber 6" Grommet Mount Strobes 4- In rear boxes on top of compaertment (2 facing side and 2 facing rear)				
6	Whelen 2GAC Amber 4" Grommet Mount Strobes 6- 4 in front bulk head stand 2- facing front and 2 facing side, 2 in rear bumper				
4	LED Work Light BPC1492128 2- on top of bulk head stand facing each side 2- on top of compartment boxes facing rear				
1	Water Cooler Rack *Adjustable Strap Included PN#BPC5201005				
2	TLIA Whelen Amber Strobes 2- in Grille				
1	Labor to Install Factory Camera				
1	Labor to deliver to DeKalb County				
Phone #	Fax #	E-mail	Web Site		
770-228-9974	770-228-7573	sales@kandkmfg.com	www.kandkmfg.com		

Estimates are valid for 7 days unless otherwise noted.



WARNER BODIES PRODUCT QUOTE

Date: 02/06/2026

Page: 1 of 2

CUSTOMER'S NAME: Brad Hicks	CUST. FAX OR EMAIL:	WARNER SALES ASSOCIATE:
COMPANY: K & K Manufacturing	CUST. PHONE NUMBER:	WARNER QUOTE NUMBER:

RE:

Product Description:

- Model: Select II
- Model #: WS2108-M-DW-U-SP. #850029
- Customer's Chassis:
 - Current production model gas engine single tank cab & chassis with a 60" cab to axle and 22.5 dual rear wheels.
 - Built w/ universal understructure.
- Construction.
 - Steel.
 - Steel A60 Galvanneal steel construction, (50% more rust resistant than competitors using A40 galvanneal).
 - Body shell constructed of 14-gauge A60 galvanneal.
 - Doors constructed of 16 & 16-gauge A 60 galvanneal. 16-gauge outer panel. 16-gauge inner panel.
 - #44002 Rubber fenders installed.
 - Clip style shelf adjusting brackets.
 - Adjustable shelving constructed of 18-gauge G90-min spangle galvanized material 250lb capacity.
 - Cargo floor has 3 /16"formed front cross-member, ¼" formed rear cross-member.
 - 2" Structural steel floor reinforcing cross-members.
 - 12-gauge treadplate cargo floor.
 - Full height bulkhead.
 - Light bar mount installed on top of bulkhead/cabguard.
- Doors.
 - Flush mount doors.
 - Heavy duty flush mounted doors, 16-gauge galvanneal outer panel with double return edge flanges. 1 ½" thick 16-gauge galvanneal inner panel.
 - 304-Stainless steel piano hinges. Bolted to body and bolted to doors.
 - Part # 31318 blind mount Compression T-handle latches with double bitted keys. Factory adjusted prior to shipment. 3 point latching system with rollers installed.
 - Gas shock door holders on vertical doors, part # 34002.
 - Coated air craft cable horizontal door supports.
 - Part # 45019 automotive door seal is factory installed.
 - All latches are keyed alike.
- Fuel-fill.
 - (1) #17251 polished stainless steel fuel fill pocket with no holes cut and pocket shipped loose.
- Tail gate.
 - 12" High slam type tailgate with part # 31320 stainless steel blind mount 2-point paddle latch and reinforcing treadplate overlay on cargo side and reinforced hinge design with ½" stainless steel hinge pin.
- Basic Body Configuration.
 - Compartment depth to be 20".
 - Compartment height to be 60".
 - Floor width is 54", (wheel boxes may be required).
 - Passenger side:
 - 1st Vertical is 33.5" wide x 20" deep x 60" high.
 - (3) Adjustable flat shelf w/5 dividers.
 - Horizontal is 49" wide x 20" deep x 39" high.
 - (2) Adjustable flat shelf w/5 dividers.
 - Lapping style barn doors.
 - Rear vertical is 25.5" wide x 20" deep x 60" high.
 - (2) Adjustable flat shelf w/5 dividers.
 - Driver side:
 - 1st Vertical is 33.5" wide x 20" deep x 60" high.
 - (4) Adjustable flat shelf w/5 dividers.
 - Horizontal is 49" wide x 20" deep x 39" high with.
 - (1) Adjustable flat shelf w/5 dividers.

All pricing good for 15 days unless otherwise specified above. This document contains proprietary and confidential information of Warner Bodies. This information cannot be copied or transmitted to any 3rd party without the prior written consent of Warner Bodies. Lead times based on schedule at time of quote. Production date will be provided on order acknowledgement.



WARNER BODIES PRODUCT QUOTE

Date: 02/06/2026

Page: 2 of 2

CUSTOMER'S NAME: Brad Hicks	CUST. FAX OR EMAIL:	WARNER SAI FS ASSOCIATE:
COMPANY: K & K Manufacturing	CUST. PHONE NUMBER:	WARNER QUOTE NUMBER:

RE:

- Lapping style barn doors.
- Rear vertical is 25.5" wide x 20" deep x 60" high.
 - (2) Adjustable flat shelf w/5 dividers.
- Master Locks
 - Master locking system installed. Spring loaded.
- Rear Curb Side Compartment
 - Rear curbside storage compartment. Through compartment access with door on the rear of the body .Vertical orientation and 10" wide x 36" tall.
- LED Compartment Lights
 - LED strip lights installed in each compartment and wired to a pigtail at the rear of the body.
 - (1) 36" section in each vertical compartment on the hinge side.
 - (2) 18" sections in each horizontal compartment on the vertical sides.
- Bumper.
 - No bumper.
- Lighting.
 - No lighting or holes supplied.
 - Customer to supply.
- Mounting.
 - No mounting provisions supplied.
- Powder Coat
 - Furnished in fleet white powder coat.
- General.
 - Entire underside of body undercoated with asphalt based undercoating.
 - 5 year warranty

Additional options customer might consider: (some requested-others manufacturer recommendation)

- Additional part # 17251 polished stainless steel fuel fill pocket, (needed if dual tank or Ford diesel engine chassis if for diesel a DEF adapter plate is included).

Commercial/Delivery Conditions:

- Terms: Net 30 days.
- FOB Warner Bodies Mfg Facility.
- Lead Time: 22 weeks.
- All amounts shown are in U.S. Dollars.
- Applicable taxes are not included in listed prices.

We stand by our superior quality and customer service. Please call me if you have any questions.
We appreciate and value your business.

Sincerely,

All pricing good for 15 days unless otherwise specified above. This document contains proprietary and confidential information of Warner Bodies. This information cannot be copied or transmitted to any 3rd party without the prior written consent of Warner Bodies. Lead times based on schedule at time of quote. Production date will be provided on order acknowledgement.