
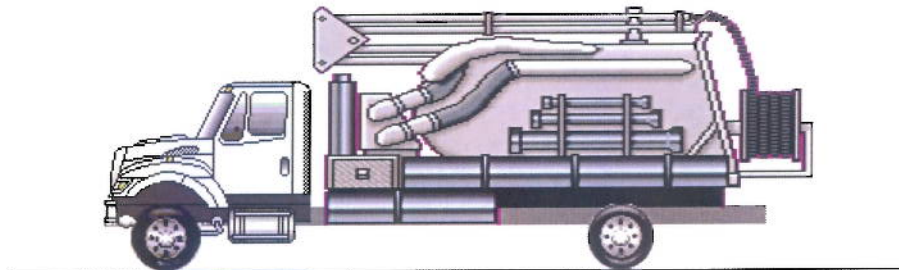


**Prepared For:**  
 DEKALB COUNTY, GEORGIA  
  
 3043 Warren Road  
 Decatur, GA 30034-  
 (404)244 - 4200  
 Reference ID: N/A

**Presented By:**  
 RUSH TRUCK CENTERS OF GA  
 Kurt Hohlstein  
 2560 MORELAND AVE SE  
 ATLANTA GA 30315 -  
 (404)622-1921

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.



**Model Profile**  
**2020 HV507 SFA (HV507)**

<b>AXLE CONFIG:</b>	4X2
<b>APPLICATION:</b>	Sewer Vac
<b>MISSION:</b>	Requested GVWR: 41000. Calc. GVWR: 43000 Calc. Start / Grade Ability: 28.86% / 3.84% @ 55 MPH Calc. Geared Speed: 74.4 MPH
<b>DIMENSION:</b>	Wheelbase: 236.00, CA: 161.00, Axle to Frame: 75.00
<b>ENGINE, DIESEL:</b>	{Cummins L9 370} EPA 2017, 370HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 3000 RDS} 5th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
<b>AXLE, REAR, SINGLE:</b>	{Dana Spicer S23-172} Single Reduction, 23,000-lb Capacity, R Wheel Ends Gear Ratio: 5.25
<b>CAB:</b>	Conventional, Day Cab
<b>TIRE, FRONT:</b>	(2) 425/65R22.5 Load Range L G296 MSA (GOODYEAR), 468 rev/mile, 68 MPH, All-Position
<b>TIRE, REAR:</b>	(4) 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position
<b>SUSPENSION, REAR, SINGLE:</b>	31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Multileaf Springs
<b>PAINT:</b>	Cab schematic 100WK Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HV50700	Base Chassis, Model HV507 SFA with 236.00 Wheelbase, 161.00 CA, and 75.00 Axle to Frame.	5946/3741	9687
1ANA	AXLE CONFIGURATION {Navistar} 4x2	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CAJ	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.437" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL	257/520	777
1LLK	BUMPER, FRONT Omit Item	-88/12	-76
1WDS	FRAME EXTENSION, FRONT Integral; 20" In Front of Grille	131/-26	105
1WEW	WHEELBASE RANGE 197" (500cm) Through and Including 264" (670cm)	0/0	0
1WSE	SPECIAL FRAME PIERCING for Vac-Con, Inc.	0/0	0
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	186/0	186
3708	SHOCK ABSORBERS, FRONT	45/0	45
3ACS	SUSPENSION, FRONT, SPRING Multileaf, Shackle Type, 20,000-lb Capacity, Less Shock Absorbers	224/0	224
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic (with Air Cam Brakes) : SLACK ADJUSTERS, REAR Automatic (with Air Cam Brakes) : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6		
4193	BRAKES, FRONT, AIR CAM 16.5" x 6", Includes 24 SqIn Long Stroke Brake Chambers	26/0	26
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)	0/0	0
4EBT	AIR DRYER {Bendix AD-IP} with Heater	19/8	27
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake	0/39	39
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	18/0	18
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake	0/26	26
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	15/6	21
4WBX	DUST SHIELDS, FRONT BRAKE for Air Brakes	5/0	5
4WDM	DUST SHIELDS, REAR BRAKE for Air Brakes	0/6	6

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4WRP	DRAIN VALVE Automatic, with (3) Pull Chains, for Air Tanks	0/0	0
4WZJ	AIR TANK LOCATION (2) : One Mounted Under Each Frame Rail, Front of Rear Suspension, Parallel to Rail	0/0	0
5708	STEERING COLUMN Tilting	14/1	15
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	91/-4	87
6DGC	DRIVELINE SYSTEM {Dana Spicer} SPL170, for 4x2/6x2	6/32	38
7BEU	AFTERTREATMENT COVER Aluminum	9/2	11
7BKS	EXHAUST SYSTEM Single, Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	139/37	176
7SCP	ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger	0/0	0
7WAZ	TAIL PIPE (1) Turnback Type	0/0	0
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel	0/0	0
7WDM	EXHAUST HEIGHT 10'	2/0	2
7WZY	SWITCH, FOR EXHAUST 2 Position, Lighted & Latching, On/Off Type, Mounted in IP, Inhibits Diesel Particulate Filter Regeneration as Long as Switch is in On Position	2/0	2
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u>		
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab		
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
	: WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount	0/0	0
8HAA	BODY BUILDER WIRING To Rear of Frame, with Stop, Tail, Turn, and Marker Lights Circuits, Ignition Controlled Auxiliary Feed and Ground, Less Trailer Socket	2/0	2
8MSG	BATTERY SYSTEM {Fleotrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud	32/21	53
8RML	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/3.5MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music	4/0	4
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8TKJ	STOP, TURN, TAIL & B/U LIGHTS {Truck Lite} Super 44, with LED Lights for Stop, Turn, Tail and Backup Lights, with Power Module, "International" Termination and Less Junction Box, Includes License Plate Light	0/2	2
8TNR	BATTERY CABLES with 36" of Extra Length Coiled and Strapped Near Battery Box	0/0	0
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	-31/8	-23
8WNH	RUNNING LIGHT (2) Daytime	0/0	0
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	0/0	0
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt, Less Thermal Over-Crank Protection	8/1	9
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm	0/0	0
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position	0/0	0
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender	0/0	0
8XHN	HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord	3/0	3
9585	FENDER EXTENSIONS Rubber	6/0	6
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9ANG	HOOD, HATCH (01) for Servicing	5/0	5
9HAN	INSULATION, UNDER HOOD for Sound Abatement	10/0	10
9HBM	GRILLE Stationary, Chrome	0/0	0
9HBN	INSULATION, SPLASH PANELS for Sound Abatement	2/0	2
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u>		
	: PAINT SCHEMATIC ID LETTERS "WK"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10JPA	CUSTOMER IDENTITY for National Joint Powers Alliance	0/0	0
10SLV	PROMOTIONAL PACKAGE Government Silver Package	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
11001	CLUTCH Omit Item (Clutch & Control)	-55/-8	-63
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12849	BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines <u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door	3/0	3
12851	PTO EFFECTS, ENGINE FRONT Less PTO Unit, Includes Adapter Plate on Engine Front Mounted	10/0	10
12EHY	ENGINE, DIESEL {Cummins L9 370} EPA 2017, 370HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)	561/3	564
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed with Residual Torque Device for Disengaged Fan Speed <u>Includes</u> : FAN Nylon	0/0	0
12UWY	RADIATOR Cross Flow, Series System; 1228 SqIn Aluminum Radiator Core and 1167 SqIn Charge Air Cooler <u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber	0/0	0
12VBC	AIR CLEANER Single Element	0/0	0
12VGZ	FEDERAL EMISSIONS {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2019	0/0	0
12VXV	THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic, Mobile, Variable Speed; (Range 2 to 20 MPH) Mounted on Steering Wheel	2/0	2
12WZJ	EMISSION COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal located on Driver Door	0/0	0
12XAT	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; with Ignition Switch Control for Cummins ISB/ B6.7 or ISL/L9 Engines	0/0	0
13AVR	TRANSMISSION, AUTOMATIC {Allison 3000 RDS} 5th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway	198/52	250
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type	25/0	25
13WET	TRANSMISSION SHIFT CONTROL for Column Mounted Stalk Shifter	0/0	0
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
13WUH	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); Airport Refueler, Sewer Evac	0/0	0
13WYU	SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming	0/0	0
13XAA	PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Switch, Electric/Air Solenoid, Piping and Wiring	5/0	5

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
13XAL	PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission	0/0	0
14AWL	AXLE, REAR, SINGLE {Dana Spicer S23-172} Single Reduction, 23,000-lb Capacity, R Wheel Ends . Gear Ratio: 5.25	0/114	114
14SAL	SUSPENSION, REAR, SINGLE 31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Multileaf Springs	0/177	177
15DYP	DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab	14/3	17
15LMN	FUEL/WATER SEPARATOR {Racor 400 Series,} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor	0/0	0
15LPP	LOCATION FUEL/WATER SEPARATOR Mounted Inside Left Rail, 24" Back of Cab	-1/1	0
15SJR	FUEL TANK Top Draw, Non-Polished Aluminum, 26" Dia, 100 US Gal (379L), Mounted Left Side, Under Cab	46/25	71
15WCS	FUEL COOLER Less Thermostat; Mounted in Front of Cooling Module	14/0	14
15WTM	AUXILIARY FUEL DRAW TUBE Located at Auxiliary Port on Fuel Tank	0/0	0
16030	CAB Conventional, Day Cab	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	55/1	56
16GDC	GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display	0/0	0
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel	2/0	2
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16JNT	SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust	-14/-4	-18
16RPV	SEAT, PASSENGER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Adjust	73/23	96
16SMW	GRAB HANDLE, EXTERIOR Black, Aluminum, for Cab Entry Mounted Left Side at B-Pillar	0/0	0
16SNN	MIRRORS (2) C-Loop, Heated, Bright Heads, Black Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width	0/0	0
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"		
16VKB	CAB INTERIOR TRIM Classic, for Day Cab	0/0	0
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap		
16WBY	ARM REST, RIGHT, DRIVER SEAT	3/0	3
16WBZ	ARM REST, LEFT, PASSENGER SEAT	3/0	3
16WSK	CAB REAR SUSPENSION Air Bag Type	0/0	0
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors	0/0	0
16XCW	CAB, INTERIOR TRIM, CLOSEOUT Under IP, Driver Side	0/0	0
16XJN	INSTRUMENT PANEL Flat Panel	0/0	0
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab	0/0	0
27DBA	WHEELS, FRONT {Accuride 29374} DISC; 22.5x12.25 Rims, Extra Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	-10/0	-10
28DVN	WHEELS, REAR {Accuride 42644} DUAL DISC; 22.5x8.25 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/-128	-128
7372138132	(4) TIRE, REAR 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position	0/0	0
7752668113	(2) TIRE, FRONT 425/65R22.5 Load Range L G296 MSA (GOODYEAR), 468 rev/mile, 68 MPH, All-Position	134/0	134
	<b>Services Section:</b>		
40128	WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A	0/0	0
40KMA	SERVICES, TOWING {Navistar} Service Call to 24-Month/Unlimited Mileage to the Nearest Navistar Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$550 (USA) Maximum Benefit per Incident	0/0	0
40SZD	SRV CONTRACT, EXT CMS ENG/AFTR {Cummins} To 60-Month/100,000 Miles (160,000 km), Extended Cummins L9 Engine Coverage, Protection Plan 1 and Aftertreatment	0/0	0
	<b>Total Component Weight:</b>	<b>8158/4691</b>	<b>12849</b>

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.



7/30/19

**HIGH PRESSURE SEWER CLEANER  
SOURCEWELL CONTRACT: 122017-AMI**

Customer: **DEKALB COUNTY FLEET**

Shipping: **GEORGIA**

Requirement Specification	
High Pressure jet sewer cleaner with all standard equipment HS 1600	\$90,988.00
Mounted on a customer supplied chassis	\$0.00
Body mounting on Chassis	\$3,741.00
Front mounted articulating to driver side hose reel, 800' (1") capacity	\$17,632.00
1600 Gallon polyethylene water tank capacity with 10 year warranty	\$0.00
800' of 3/4" x 3000 PSI Jet hose	\$1,971.00
Water pump rated 50 GPM @ 3000 PSI with smooth continuous pressure	\$0.00
Ford Power Products Gas auxiliary engine, 6.8 liter, 10-cylinder, V-10, 222HP at 3200RPM	\$0.00
100' Capacity handgun hose reel	\$3,735.00
2 1/2" Water drain gate valve assembly	\$306.00
Air purge system	\$868.00
Lateral cleaning kit with 150' x 1/2" hose with nozzle, dolly style mounts	\$3,300.00
Water pump remote oil drain	\$281.00
Winter recirculating connection for low pressure circuit	\$271.00
Winter recirculating system for rodder hose	\$1,072.00
Digital electronic footage counter	\$4,005.00
Power guide "Reel Power" level wind guide	\$5,250.00
Auxiliary engine remote oil drain	\$287.00



**Requirement Specification**

Cone storage rack, best location	\$432.00
Grease assembly articulating hose reel	\$1,143.00
Long handle storage - PVC (2), rear of mainframe	\$523.00
Plastic engraved decals, adhesive type	\$1,776.00
Rear bumper assembly	\$1,828.00
Rear mounted tow hooks	\$367.00
Hand held LED spot light with 50' retractable cord	\$1,094.00
LED 4 strobes - 2 front bumper. 2 rear bumper	\$1,980.00
LED Arrow board	\$3,862.00
LED flood light to view level wind guide with guard	\$431.00
Two LED mid body flood lights with guards	\$1,524.00
LED rear mounted flood lights with limb guard	\$762.00
LED strobe light rear debris tank mounted with limb guard	\$961.00
Two Mirror mounted LED strobe lights with limb guards	\$1,922.00
Back up alarm	\$284.00
Low water alarm with light	\$527.00
Rear camera placement	\$573.00
Traffic camera system with color monitor	\$1,236.00
Cann-locks for water fill hose	\$249.00
2 1/2" Diameter x 25' long hydrant hose, spare	\$0.00
All lights to have rubber grommets	\$0.00
Anti-Sail mud flaps, rear	\$318.00
Blue reflective striping package	\$0.00
Chock blocks (2) aluminum connecting chains with 12" x 12"	\$0.00
Heavy duty water tank lid and fill system	\$0.00

**Requirement Specification**

Two Paper Vac-Con Manuals	\$412.00
Protectors 1" x 1/4" Deep thick pipe protectors for lower stop and back up lights with branch guards	\$0.00
Reflective striping on square post at rear of water tank	\$0.00
3/4" Nozzle rack	\$125.00
3/4" x 20' Length leader hose	\$449.00
Gas Engine extended warranty, 5YRS or 5000HRS	\$2,742.00
Two 16" x 13" x 72" Aluminum side mounted tool box	\$3,234.00
Two 16" x 13" x 72" Steel tool boxes	\$3,714.00
Two standard ENZ nozzles, one sanitary (egg) and one Chisel point penetrator	\$0.00
ICC lighting	\$0.00
Hose guide (tiger tail) for hose protection, hydrant wrench, 25' of fill hose	\$0.00
20 gpm @ 600 PSI wash down system with hand gun and 25' of 1/2" hand gun hose	\$0.00
Paint : Body unit :TBA	\$0.00
Local dealer pre delivery inspection	\$0.00
Training at customer facility	\$0.00
Consignee Delivery and training to customer facility	\$1,060.00
TOTAL UNIT COST PER CONTRACT	\$167,235.00
ADDITIONAL DISCOUNT OFFERED BY LOCAL DEALER QUANTITY PURCHASE	(\$5,323.50)
TOTAL UNIT PRICE OFFERED TO CUSTOMER	\$161,911.50

Delivery is            **Days after receipt of order.**

SOURCEWELL CONTRACT NO 122017-AMI

VENDOR/CONTRACT HOLDER: ATLANTIC MACHINERY, INC. 2628 GARFIELD AVE. SILVER SPRING, MD 20910

CONTACT: M.J. DUBOIS      MAIL [MDUBOIS@DUCOLL.C.COM](mailto:MDUBOIS@DUCOLL.C.COM)      410-924-1004

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items		
Service Items		
Total Factory List Price Including Options:		\$139,858.00
Freight	\$2,350.00	
Total Freight:		\$2,350.00
Total Factory List Price Including Freight:		\$142,208.00
Less Customer Allowance:		(\$47,205.62)
Total Vehicle Price:		\$95,002.38
Total Body/Allied Equipment:		\$161,911.50
Total Sale Price:		\$256,913.88
Total Per Vehicle Sales Price:		\$256,913.88
Net Sales Price:		\$256,913.88

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller: KURT HOWLSTEIN  
 Official Title and Date \_\_\_\_\_  
 Authorized Signature [Signature]

Accepted by Purchaser: \_\_\_\_\_  
 Firm or Business Name \_\_\_\_\_  
 Authorized Signature and Date \_\_\_\_\_

This proposal is not binding upon the seller without Seller's Authorized Signature

\_\_\_\_\_  
Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.