


Prepared For:
DEKALB COUNTY, GEORGIA
3043 Warren Road
Decatur, GA 30034-
(404)244 - 4200
Reference ID: state of ga

Presented By:
RUSH TRUCK CENTERS OF GA
Kurt Hohlstein
2560 MORELAND AVE SE
ATLANTA GA 30315 -
(404)622-1921

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

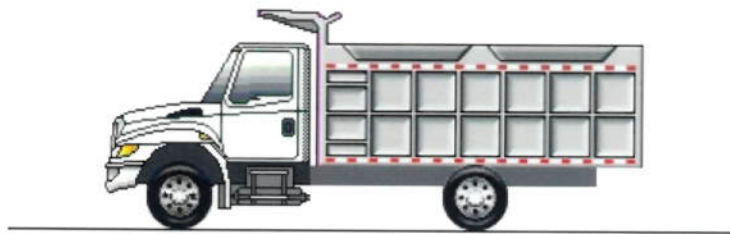

Model Profile
2027 MV607 SBA (MV607)

AXLE CONFIG:	4X2
APPLICATION:	Construction Dump
MISSION:	Requested GVWR: 35000. Calc. GVWR: 35000. Calc. GCWR: 80000 Calc. Start / Grade Ability: 44.39% / 3.81% @ 55 MPH Calc. Geared Speed: 66.6 MPH
DIMENSION:	Wheelbase: 152.00, CA: 84.90, Axle to Frame: 63.00
ENGINE, DIESEL:	{Cummins L9 330} EPA 2024, 330HP @ 2200 RPM, 1000 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 330 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 3500 RDS} 6th Generation Controls, Wide Ratio, 5-Speed with Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-12-122A} I-Beam Type, 12,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends Gear Ratio: 5.38
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 11R22.5 Load Range H HSR 3 (CONTINENTAL), 494 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(4) 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, SINGLE:	31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Rubber Springs
PAINT:	Cab schematic 100WP Location 1: 9219, Winter White (Std) Chassis schematic N/A

Vehicle Specifications
2027 MV607 SBA (MV607)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
MV60700	Base Chassis, Model MV607 SBA with 152.00 Wheelbase, 84.90 CA, and 63.00 Axle to Frame.	5381/3069	8450
1570	TOW HOOK, FRONT (2) Frame Mounted	8/0	8
1ANA	AXLE CONFIGURATION 4x2	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CAG	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.250" x 3.610" x 0.375" (260.4mm x 91.7mm x 9.5mm); 456.0" (11582mm) Maximum OAL	88/269	357
1LSE	BUMPER, FRONT Swept Back, Steel, Painted Gray, Heavy Duty	51/-8	43
1WDS	FRAME EXTENSION, FRONT Integrated, 2011.5" x 11.5" x 1.5" (511.5cm x 29.2cm x 3.8cm)	144/-39	105
1WEH	WHEELBASE RANGE 134" (340cm) Through and Including 197" (500cm)	75/-75	0
2ASC	AXLE, FRONT NON-DRIVING (Meritor MFS-12-122A) I-Beam Type, 12,000-lb Capacity	42/0	42
3ADC	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 12,000-lb Capacity, with Shock Absorbers	36/0	36
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
	<u>Notes</u> : In combinations where chassis component weights may cause a chassis lean, a spring is used in front left spring pack to offset this imbalance & provide a level chassis, within 3/8", with body installed.		
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6		
4619	TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck	1/0	1
	<u>Notes</u> : When electronic stability control is ordered with trailer connections on a 4x2 truck, please check the operator manual for trailer weight restrictions.		
4AZA	AIR BRAKE ABS (Bendix AntiLock Brake System) 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System	0/0	0
4EDR	AIR DRYER (Wabco HP) with Heater	0/0	0
4ERC	BRAKE CHAMBERS, POSITION Relocated To Rear Of Rear Axle For Maximum Ground Clearance	0/0	0
4ESX	BRAKE CHAMBERS, FRONT AXLE (Haldex) 20 SqIn	13/0	13

Vehicle Specifications
2027 MV607 SBA (MV607)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	0/39	39
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	0/0	0
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	14/0	14
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/16	16
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	37/1	38
4VKJ	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Left Rail, Back of Cab, Perpendicular to Rail	23/34	57
4VLE	AIR DRYER LOCATION Mounted Inside Engine Compartment, Right Side	0/0	0
4WBX	DUST SHIELDS, FRONT BRAKE for Air Cam Brakes	10/0	10
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes	0/10	10
4WWZ	DRAIN VALVE (3) with Pull Chains for Air Tanks	2/0	2
4XDC	BRAKES, FRONT {Meritor 15X4 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 15" X 4", 13,200-lb Capacity	0/0	0
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/0	0
5708	STEERING COLUMN Tilting	14/2	16
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PSA	STEERING GEAR {Sheppard M100} Power	28/-6	22
6DGC	DRIVELINE SYSTEM {Dana Spicer} SPL170, for 4x2/6x2	9/29	38
7BEV	AFTERTREATMENT COVER Steel, Black	10/3	13
7BLV	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Short Horizontal Tail Pipe, Frame Mounted Right Side Back of Cab	58/-7	51
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	<u>Includes</u>		
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab		
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel		
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever		
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light		
	: STARTER SWITCH Electric, Key Operated		
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector		
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature		
	: TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted		
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever		
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted		
	: WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense	0/0	0

Vehicle Specifications
2027 MV607 SBA (MV607)

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/ Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn	0/3	3
8HAH	ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket	0/2	2
8MJU	BATTERY SYSTEM {Fleetrife} Maintenance-Free, (3) 12-Volt 2850CCA Total, Top Threaded Stud	32/42	74
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	5/0	5
8RPP	ANTENNA Shark Fin, Roof Mounted	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
8TKK	TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/ Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch	1/0	1
8VBE	HORN, ELECTRIC (1) Trumpet Style	0/0	0
8VUL	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Left Side Back of Cab	-16/24	8
8WBW	JUMP START STUD 12V, Remote Mounted	2/0	2
	<u>Includes</u> : JUMP START STUD Mounted to Battery Box		
8WGB	SOLENOID, AIR for Customer Use; Provides (2) Normally Closed Pilot Air Source, Approx. 4 CFM, Includes Latched Switch in Cab; Air Available Only with Key in "Ignition" or "Accessory" Position; Air Will Exhaust with Key in "Off" Position	2/0	2
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On	0/0	0
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt, Less Thermal Over-Crank Protection	8/0	8
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm	0/0	0
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8XHD	BATTERY DISCONNECT SWITCH 300 Amp, Disconnects Charging Circuits, Locks with Padlock, Cab Mounted	2/0	2
8XHN	HORN, AIR Single Trumpet, Black, with Lanyard Pull Cord	3/0	3
8XNZ	HEADLIGHTS Halogen, with Daytime Running Lights	0/0	0

Vehicle Specifications
2027 MV607 SBA (MV607)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9HCX	GRILLE Stationary, Molded in Black	0/0	0
9WBN	FENDER EXTENSIONS Painted	0/0	0
9WBW	FRONT END Tilting, Fiberglass, with Three Piece Construction, Dual Air Intakes	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WP"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10AGB	CONNECTED PLATFORM Includes Connectivity Module and Five Year Data Plan	0/0	0
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.	0/0	0
	<u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.		
10WUE	MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension	12/0	12
11001	CLUTCH Omit Item (Clutch & Control)	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12EYX	ENGINE, DIESEL {Cummins L9 330} EPA 2024, 330HP @ 2200 RPM, 1000 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 330 Peak HP (Max)	553/11	564
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	44/-4	40
	<u>Includes</u> : FAN Nylon		
12VCE	AIR CLEANER Single Element, Fire Retardant Media	0/0	0
12VKL	EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2026	0/0	0
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	0/0	0
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	0/0	0
12WVH	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Door	0/0	0
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations	0/0	0
12XBM	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines	0/0	0

Vehicle Specifications
2027 MV607 SBA (MV607)

February 09, 2026

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
12XCA	RADIATOR Aluminum, 3-Row, Down Flow, Front to Back System, 837 SqIn Louvered, with 477 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler	0/0	0
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty	0/0	0
13BDM	TRANSMISSION, AUTOMATIC {Allison 3500 RDS} 6th Generation Controls, Wide Ratio, 5-Speed with Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway	210/73	283
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13XAA	PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Switch, Electric/Air Solenoid, Piping and Wiring	3/0	3
13XAL	PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission	0/0	0
14051	AXLE, REAR, SINGLE {Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends . Gear Ratio: 5.38	0/268	268
14VAJ	SUSPENSION, REAR, SINGLE 31,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Rubber Springs	0/137	137
15LMR	FUEL/WATER SEPARATOR {Racor 400 Series,} with Primer Pump, Includes Water-in-Fuel Sensor	0/0	0
15LRE	LOCATION FUEL/WATER SEPARATOR Mounted Under Hood, Left Side, Above Front Axle	0/0	0
15SGJ	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 50 US Gal (189L), Mounted Left Side, Under Cab	23/3	26
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
16030	CAB Conventional, Day Cab	0/0	0
	<u>Includes</u> : CLEARANCE/MARKER LIGHTS (5) Flush Mounted		
16975	HEATER HOSES Silicone	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	56/0	56
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer	0/0	0
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for		

Vehicle Specifications
2027 MV607 SBA (MV607)

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure or Auxiliary Air Pressure (if Air Equipped) : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure, Primary and Secondary (if Air Equipped)		
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel	2/0	2
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16KCA	SEAT, DRIVER {National 2000 195} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Seat Back Angle Adjust, Dual Shocks	-18/-9	-27
16SED	GRAB HANDLE, EXTERIOR (2) Black, Aluminum, for Cab Entry Mounted Left and Right Side at B-Pillar	4/0	4
16SMH	SEAT, TWO-MAN PASSENGER {National} Fixed Back, Integrated Headrest in Both Occupant Positions, Vinyl, with Under Seat Storage Compartment	34/37	71
16SSR	MIRRORS (2) C-Loop, Power Adjust, Heated, Turn Signals, LED Clearance Lights, Black Heads and Arms, 7" x 14.5" Flat Glass, Includes 8" x 6" Convex Mirrors, for 96" Load Width	0/0	0
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"		
16VKB	CAB INTERIOR TRIM Classic, for Day Cab	0/0	0
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap		
16VLK	CAB REAR SUSPENSION Air Suspension, for Mid Cab Height	42/0	42
16WBY	ARM REST, RIGHT, DRIVER SEAT	3/0	3
16WHJ	HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type	0/0	0
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	5/0	5
16XCW	CAB, INTERIOR TRIM, CLOSEOUT Under IP, Driver Side	0/0	0
16XJN	INSTRUMENT PANEL Flat Panel	0/0	0
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab	0/0	0
27DTT	WHEELS, FRONT {Accuride 28828} DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and with Steel Hubs	14/0	14

Vehicle Specifications
2027 MV607 SBA (MV607)

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
28DTT	WHEELS, REAR {Accuride 28828} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and with Steel Hubs	0/28	28
60AAA	BDY INTG, REMOTE POWER MODULE Mounted Under Cab or On Battery Box, Up to 6 Outputs & 6 Inputs, Max 20 amp per Channel, Max 80 amp Total; Includes 1 Switch Pack with Latched Switches	0/0	0
60ACT	BDY INTG, SWITCH MOMNTRY 3POS Rocker, Backlit, with "ON" Indicator Mounted on Dash, Latching Software, for 2; Auxiliary Load 20 amp. Maximum; Power Available Only in "Ignition" or "Accessory" Position, Output Also Controlled by a Customer Remote Mounted Switch (requires 2 Remote Power Module inputs & 2 outputs)	0/0	0
60AJK	BDY INTG, INDICATOR LIGHTS (2) 1 for Body Up, 1 for Gate Open, Includes Audible Alarm, Programmable Mode for Various Switch Actions. (Requires 2 Remote Power Module Inputs)	0/0	0
7382135439	(2) TIRE, FRONT 11R22.5 Load Range H HSR 3 (CONTINENTAL), 494 rev/mile, 75 MPH, All-Position	78/0	78
7382135444	(4) TIRE, REAR 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive	0/168	168
Services Section:			
40129	WARRANTY Standard for MV Series, Effective with Vehicles Built July 1, 2017 or Later, CTS-2020A	0/0	0
40YZL	SRV CONT, EXT CUMMINS ENG/AFTR {Cummins} To 60-Month/100,000 Miles (160,000 km), Extended Cummins L9 Engine Coverage, Protection Plan 1 and Aftertreatment, (Truck Application Only)	0/0	0
Total Component Weight:		7157/4120 (lbs)	11277 (lbs)
		(lbs)	(lbs)

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

Quote

MAILING
 P. O. BOX 1147 DUNN, NC 28335
 910 892-0141



LOCATION
 17665 HWY 42IS. DUNN, NC 28334
 FAX: 910 892-7402

800 892-0181

Building Truck Equipment Since 1966

QUOTE NUMBER 0163008
 Customer Number: 02-RUSH TR

QUOTE DATE 2/6/2026
 Salesperson: EARL MANNING

Quote Valid for:

Sold To:
 RUSH ENTERPRISES INC
 PO BOX 34510
 SAN ANTONIO, TX 78265-4510

Ship To:
 RUSH TRUCK CENTER
 2560 MORELAND AVE SE.
 Atlanta, GA 30315

ATTENTION:

F.O.B.

Delivery Terms

Ship VIA

Payment Terms
 NET 30

Item Code	Description	Ordered	List Price
DEKALB COUNTY			
350U10/24G	BODY 350U 10 X 24 SIDES 10GA	1.00	
816SFDA-10 P22	HOIST 816SF DA 10 FT P22	1.00	
187AR-50-10/23	50 SERIES BDY 3/16AR UPG 10/24	1.00	
3/16ARF-50SB/10	FLOOR AR3/16 150/350 10FT	1.00	
OAKSIDEBD10	OAK SIDE BOARD 10' (STD 6- 8")	1.00	
CPCONT300/F36	CAB PROTECTOR 24"	1.00	
AC300BOLT	ASPHALT CHUTE 300U AND T BOLT	1.00	
LIGHTHOLE	LIGHT HOLES IN CP, RA, RCP	2.00	
	DUAL OVALS IN REAR CORNER POST FOR STT/BU COMBO LIGHT AND STROBE		
HAS	HIDE A STEP	1.00	
	PASSENGER SIDE FRONT		
HANDLES	OUTSIDE HANDLES ON DUMP BODY	1.00	
OUTSIDESTEPS	OUTSIDE STEPS ON DUMP BODY	1.00	
INSIDESTEPS	INSIDE STEPS ON DUMP BODY	1.00	
P2942	TARP DONOVEN HAMMER 3 PC ARM S	1.00	
BLACKPAINT	ZINC PRIME & BLACK POWDER COAT	1.00	
INSINGLE	INSTALL SNGL AXLE BDY UP/DOWN	1.00	
INSBP200	HITCH PINTLE SPRING 25 TON.	1.00	
INS6PIN	INSTALL 6-PIN ELECTRIC PLUG	2.00	
INS7PINRND	INSTALL 7-PIN ELECT PLUG ROUND	1.00	
INSSEALEDHARN	INSTALL SEALED WIRING HARNESS	1.00	
EBC	ELECTRIC BRAKE CONTROL	1.00	

continued

MAILING
P. O. BOX 1147 DUNN, NC 28335
910 892-0141



LOCATION
17665 HWY 42 IS. DUNN, NC 28334
FAX: 910 892-7402

Building Truck Equipment Since 1966

QUOTE NUMBER 0163008

QUOTE DATE 2/6/2026

Customer Number: 02-RUSH TR

Salesperson: EARL MANNING

Quote Valid for:

Sold To:
RUSH ENTERPRISES INC
PO BOX 34510
SAN ANTONIO, TX 78265-4510

Ship To:
RUSH TRUCK CENTER
2560 MORELAND AVE SE.
Atlanta, GA 30315

ATTENTION:

F.O.B. Delivery Terms Ship VIA Payment Terms
NET 30

Item Code	Description	Ordered	List Price
INSSTT	INSTALL STT AND BACK-UP LED	2.00	
97DB BUALARM	97db BACK UP ALARM - STANDARD	1.00	
INS8HEAD	INSTALL 8-HEAD FLASHING LED	1.00	
PLOWLIGHTKIT	PLOW LIGHTS, BRACKET, HARNESS	1.00	
SINGLEDUMP	INSTALL SINGLE LEVER DUMP CTRL	1.00	
PTOMUNCIE	PTO MUNCIE HOT SHIFT	1.00	
DELIVERY425	DELIVERY CHRG 400-449 MILES	1.00	
INSATG	LABOR TO INSTALL ATG	1.00	
F183541	SKID PLATE DEKALB COUNTY	1.00	

TO BE INSTALLED ON CUSTOMER SUPPLIED CHASSIS WITH 84" GA, CLEAR FRAME RAILS UNDER AND OUTSIDE, INTEGRAL FRONT FRAME EXTENSION, STATIONARY GRILLE, PLOW LIGHT PREP PACKAGE, AUTOMATIC ALLISON 3000 SERIES OR BETTER TRANSMISSION WITH LIVE PTO CAPABILITY, AND INTEGRAL FRONT FRAME EXTENSION

INSULATESIDES	INSULATE SIDES	0.00
---------------	----------------	------

Quote prepared by:
Chris Bernhard
910 321-8917
cbernhard@godwinmfg.com

On installations involving more than 1 unit, Godwin Manufacturing reserves the right to only start the installation process after all the chassis' are on hand and group them together for completion, regardless of the spacing of chassis arrival. This allows us to provide the customer with a more consistent product and run our facility more efficiently. We are not responsible for floor plan accumulated while the chassis are at our facility.

