



Rush Truck Center Atlanta

2560 Moreland Avenue
SE Atlanta, GA 30315
(678) 420-7501

Customer Proposal Letter

Dekalb County

1300 Commerce Drive
Decatur, GA 30030

Tommy, Thank you for the opportunity to earn your business. Please review the proposal below, if you approve, sign and return to us at your convenience. We look forward to working with you and will continue to provide excellence for all future business.

VEHICLE INFORMATION

Make International Model MV607 Year 2026 Stock Number To Be Determined

To be delivered on or about Winter 2025

2026 International MV607 w/ lube body mounted and delivered:
Price includes DOAS FEE

State of Georgia Contract # 9999-SPD-SPD0000155-0001

Quantity	1	Total
*Truck price per Unit	\$332,821.00	\$
Georgia State Contract Discount	\$ -7,000.00	
Net Sale Price	325,821.00	
Optional Extended Warranty(ies)		
State Sales Tax		
Documentary Fee		
Administration Fee		
Vehicle Inventory Tax		
Additional Taxes		
Tire Recycling Program		
Battery Disposal Fee		
Out of State Vehicle Fee		
Rebate(s)		
Total Sales Price (Including Rebate(s))		\$ 325,821.00
Trade Allowance (see DISCLAIMER Below)		\$0.00

Sales Representative

Kurt Hohlstein

Purchaser

signature

printed name

signature

printed name

title

date

Accepted by Sales Manager or
General Manager

signature

printed name

Quote good until

Note: The above Customer Proposal is a quotation only. Sale terms subject to approval of Sales Manager of Dealer.

DISCLAIMER: Any order based on this Proposal subject to Customer executing Dealer's standard form Retail Purchase Order incorporating above terms. Any documentary fees, state tax, title, registration and license fees subject to adjustment and change. Actual F.E.T. to be paid by Dealer, subject to adjustment. Any F.E.T. variance will be responsibility of Dealer. Manufacturer has reserved the right to change the price to Dealer of any vehicle not currently in Dealer's stock, without notice to Dealer. If Quoted Vehicle(s) not currently in Dealer's stock, Dealer reserves right to change Quotation Total to reflect any price increases from Manufacturer. This Proposal is based upon Dealer's current and expected inventory, which is subject to change. Dealer not obligated to retain any specific vehicles in stock, nor maintain any specific inventory level. Dealer shall not be obligated to fulfill Proposal in event quoted vehicle(s) not in stock or available within requested delivery schedule at time Proposal accepted. Dealer shall not be liable for any delay in providing or inability to provide Quoted Vehicle(s), where such inability or delay is due, in whole or in part, to any cause beyond the reasonable control of Dealer or is without the gross negligence or intended misconduct of Dealer. Above listed Trade Value based upon current appraisal of Trade Vehicle(s). Dealer may adjust Trade Value of Trade Vehicle(s) to reflect changes in condition and/or mileage of Trade Vehicle(s) between date of current appraisal and acceptance of this Proposal by Customer.

Prepared For:

State of Georgia
Department of Transportation
Atlanta, GA 30333
Reference ID: state of ga

Presented By:

RUSH TRUCK CENTERS OF GA
Kurt Hohlstein
2560 MORELAND AVE SE
ATLANTA GA 30315 -
(404)622-1921

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.



Model Profile

2026 MV607 SBA (MV607)

AXLE CONFIG:	4X2
APPLICATION:	Service Body
MISSION:	Requested GVWR: 33000. Calc. GVWR: 36000. Calc. GCWR: 80000 Calc. Start / Grade Ability: 48.79% / 4.02% @ 55 MPH Calc. Geared Speed: 67.4 MPH
DIMENSION:	Wheelbase: 191.00, CA: 123.90, Axle to Frame: 75.00
ENGINE, DIESEL:	{Cummins L9 330} EPA 2024, 330HP @ 2200 RPM, 1000 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 330 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 3500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-13-122A} I-Beam Type, 13,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends Gear Ratio: 6.14
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 11R22.5 Load Range H HSR 3 (CONTINENTAL), 494 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(4) 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, SINGLE:	23,500-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Rubber Springs
PAINT:	Cab schematic 100WP Location 1: 9219, Winter White (Std) Chassis schematic N/A

Vehicle Specifications
2026 MV607 SBA (MV607)

June 12, 2025

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
MV60700	Base Chassis, Model MV607 SBA with 191.00 Wheelbase, 123.90 CA, and 75.00 Axle to Frame.	5381/3069	8450
1570	TOW HOOK, FRONT (2) Frame Mounted	8/0	8
1ANA	AXLE CONFIGURATION 4x2	0/0	0
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CAH	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.375" x 3.705" x 0.438" (263.5mm x 94.1mm x 11.1mm); 456.0" (11582mm) Maximum OAL	236/518	754
1LEG	LICENSE PLATE HOLDER Includes Upper & Lower Mounting Plate Hardware, Mounted in Existing Holes in Front Bumper	3/0	3
1LNG	BUMPER, FRONT Contoured, Steel, Painted Gloss Black	0/0	0
1WEH	WHEELBASE RANGE 134" (340cm) Through and Including 197" (500cm)	75/-75	0
2ATN	AXLE, FRONT NON-DRIVING {Meritor MFS-13-122A} I-Beam Type, 13,000-lb Capacity	42/0	42
3AGS	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 13,000-lb Capacity, with Shock Absorbers	63/0	63
	<u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free		
	<u>Notes</u> : In combinations where chassis component weights may cause a chassis lean, a spring is used in front left spring pack to offset this imbalance & provide a level chassis, within 3/8", with body installed.		
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6		
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System	0/0	0
4EDN	AIR DRYER {Bendix AD-9SI} with Heater, Includes Safety Valve	19/-2	17
4EXP	BRAKE CHAMBERS, FRONT AXLE {Bendix} 20 SqiIn	16/0	16
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqiIn Spring Brake	0/39	39
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	0/0	0
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	14/0	14
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/16	16
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	37/1	38

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
4VLE	AIR DRYER LOCATION Mounted Inside Engine Compartment, Right Side	0/0	0
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes	0/10	10
4WXX	DRAIN VALVE {Bendix DV-2} (1) Automatic, with Heater, with (2) Berg Pull Chains, for Air Tank	2/1	3
4XDP	BRAKES, FRONT {Meritor 16.5X5 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 5", 14,700-lb Capacity	47/0	47
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/0	0
4XEZ	AIR TANK LOCATION (2) Mounted Between the Rails, Back of Cab, One on Each Side, Parallel to Rails	0/0	0
5710	STEERING COLUMN Tilting and Telescoping	17/2	19
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PSA	STEERING GEAR {Sheppard M100} Power	27/-5	22
6DGG	DRIVELINE SYSTEM {Dana Spicer} 1710, for 4x2/6x2	5/23	28
7BME	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Under Right Rail Back of Cab, Includes Single Short Horizontal Tail Pipe	0/0	0
7SCP	ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger	0/0	0
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0
	Includes : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8540	HORN, ELECTRIC (2) Trumpet Style	1/0	1
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense	0/0	0
8HAB	BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/ Turn	2/0	2
8NBR	BATTERY SYSTEM {JCI} Maintenance-Free, (3) 12-Volt 2100CCA Total, Top Threaded Stud	42/35	77

Vehicle Specifications
2026 MV607 SBA (MV607)

June 12, 2025

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8RMH	BATTERY DISCONNECT SWITCH {Cole-Hersee 75920-06} 300 Amp, Disconnects Charging Circuits, Locks with Padlock, Battery Box Mounted	2/0	2
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	5/0	5
8RPP	ANTENNA Shark Fin, Roof Mounted	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8VUX	BATTERY BOX Steel, with Plastic Cover, 25" Wide, 2-3 Battery Capacity, Mounted Right Side Under Cab	0/0	0
8WCK	POWER SOURCE, TERMINAL TYPE 2-Post	1/0	1
8WGD	SOLENOID, AIR for Customer Use; Provides (4) Normally Closed Pilot Air Source, Approx. 4 CFM, Includes Latched Switch in Cab; Air Available Only with Key in "Ignition" or "Accessory" Position; Air Will Exhaust with Key in "Off" Position	3/0	3
8WMA	SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished Back of Cab Light	2/1	3
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	1/0	1
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn On if Windshield Wipers are Turned On	0/0	0
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt, Less Thermal Over-Crank Protection	8/0	8
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm	0/0	0
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position	0/0	0
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened	0/0	0
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0
8XHN	HORN, AIR Single Trumpet, Black, with Lanyard Pull Cord	3/0	3
8XJE	TURN SIGNALS, FRONT Dual Face, LED, Amber/Amber, Mounted on Top of Fender, Used with Standard Flush Mounted Front Turn Signal, Side Marker Lamps, Parking Lights and Reflectors	0/0	0
8XNY	HEADLIGHTS Halogen	0/0	0
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9HCY	GRILLE Molded in Black, with Chrome Surround	0/0	0
9WBN	FENDER EXTENSIONS Painted	0/0	0
9WBW	FRONT END Tilting, Fiberglass, with Three Piece Construction, Dual Air Intakes	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WP"			

Vehicle Specifications
2026 MV607 SBA (MV607)

June 12, 2025

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
10506	TOOL KIT Rim Wrench and Handle Only	13/0	13
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10AGB	COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360	0/0	0
10SLV	PROMOTIONAL PACKAGE Government Silver Package	0/0	0
10UAV	VEHICLE REGISTRATION IDENTITY ID for Non-CARB Omnibus and/or Non-ACT Adopting State or Exempt Vehicle. Not for use on vehicles registering in CA/MA / OR/NJ/NY/WA. Contains non-mitigated legacy engine & cannot be registered in CA unless exempt. You may be held liable under state law for failure to properly register vehicle.	0/0	0
	<u>Notes</u> : CANNOT BE REGISTERED IN CA. For vehicles that will be registered in States other than CA.		
10WUE	MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension	12/0	12
11001	CLUTCH Omit Item (Clutch & Control)	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12849	BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines	3/0	3
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door		
12EYX	ENGINE, DIESEL {Cummins L9 330} EPA 2024, 330HP @ 2200 RPM, 1000 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed, 330 Peak HP (Max)	570/-6	564
12THJ	FAN DRIVE {Horton Drivemaster} Automatic On/Off Type, with Normally Closed Temperature Control	41/-3	38
	<u>Includes</u> : FAN Nylon		
12VCE	AIR CLEANER Single Element, Fire Retardant Media	0/0	0
12VKC	EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2025	0/0	0
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	0/0	0
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted	0/0	0
12WVG	EPA IDLE COMPLIANCE Low NOx Idle Engine, Complies with EPA Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood	0/0	0
12WZE	CARB IDLE COMPLIANCE Does Not Comply with California Clean Air Idle Regulations	0/0	0
12XBM	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines	0/0	0
12XCA	RADIATOR Aluminum, 3-Row, Down Flow, Front to Back System, 837 SqIn Louvered, with 477 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler	0/0	0

Vehicle Specifications
2026 MV607 SBA (MV607)

June 12, 2025

Code	Description	F/R Wt (lbs)	Tot Wt (lbs)
12XCS	CARB EMISSION WARR COMPLIANCE Does Not Comply with CARB Emission Warranty	0/0	0
13BDR	TRANSMISSION, AUTOMATIC {Allison 3500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway	225/58	283
13WEH	AUTOMATIC NEUTRAL Allison Transmission Shifts to Neutral When Parking Brake is Engaged and Remains in Neutral When Parking Brake is Disengaged, without On/Off Switch	0/0	0
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints	0/0	0
13WUS	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Package Number 223, Modified for Single Input Auto Neutral	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13XAN	PTO LOCATION Customer Does Not Intend to Install PTO	0/0	0
14051	AXLE, REAR, SINGLE {Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends . Gear Ratio: 6.14	0/402	402
14VAH	SUSPENSION, REAR, SINGLE 23,500-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Rubber Springs	0/86	86
15LMR	FUEL/WATER SEPARATOR {Racor 400 Series,} with Primer Pump, Includes Water-in-Fuel Sensor	0/0	0
15LRE	LOCATION FUEL/WATER SEPARATOR Mounted Under Hood, Left Side, Above Front Axle	0/0	0
15SRE	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 50 US Gal (189L), Mounted Left Side, Under Cab	21/8	29
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab	0/0	0
16030	CAB Conventional, Day Cab	0/0	0
	<u>Includes</u> : CLEARANCE/MARKER LIGHTS (5) Flush Mounted		
16BAM	AIR CONDITIONER with Integral Heater and Defroster	56/0	56
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer	0/0	0
	<u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure or Auxiliary Air Pressure (if Air Equipped)		

Vehicle Specifications
2026 MV607 SBA (MV607)

June 12, 2025

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure, Primary and Secondary (if Air Equipped)		
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} Mounted in Instrument Panel	2/0	2
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16KCA	SEAT, DRIVER {National 2000 195} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 8" Adjuster, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, 6-23 Degree Seat Back Angle Adjust, Dual Shocks	-20/-7	-27
16SED	GRAB HANDLE, EXTERIOR (2) Black, Aluminum, for Cab Entry Mounted Left and Right Side at B-Pillar	4/0	4
16SMH	SEAT, TWO-MAN PASSENGER {National} Fixed Back, Integrated Headrest in Both Occupant Positions, Vinyl, with Under Seat Storage Compartment	41/30	71
16SNW	MIRROR, CONVEX, LOOK DOWN Right Side, Black, 6" x 10.5"	3/0	3
16SSG	MIRROR, CONVEX, HOOD MOUNTED (1) Right Side, Breakaway, Black	0/0	0
16SSR	MIRRORS (2) C-Loop, Power Adjust, Heated, Turn Signals, LED Clearance Lights, Black Heads and Arms, 7" x 14.5" Flat Glass, Includes 8" x 6" Convex Mirrors, for 96" Load Width	0/0	0
	<u>Notes</u>		
	: Mirror Dimensions are Rounded to the Nearest 0.5"		
16VKB	CAB INTERIOR TRIM Classic, for Day Cab	0/0	0
	<u>Includes</u>		
	: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger		
	: DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted		
	: SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap		
16VLK	CAB REAR SUSPENSION Air Suspension, for Mid Cab Height	42/0	42
16WBY	ARM REST, RIGHT, DRIVER SEAT	3/0	3
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	5/0	5
16XCW	CAB, INTERIOR TRIM, CLOSEOUT Under IP, Driver Side	0/0	0
16XJN	INSTRUMENT PANEL Flat Panel	0/0	0
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab	0/0	0
27DJM	WHEELS, FRONT {Maxion 91541} DISC; 22.5x8.25 Rims, Painted Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
28DTT	WHEELS, REAR {Accuride 28828} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and with Steel Hubs	0/28	28
29PAR	PAINT IDENTITY, FRONT WHEELS Disc Front Wheels; with Vendor Applied White Powder Coat Paint	0/0	0
60AAG	BDY INTG, REMOTE POWER MODULE Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs, Max 20 amp per Channel, Max 80 amp Total; Includes 1 Switch Pack with Latched Switches	0/0	0
60AKG	BDY INTG, PTO ACCOMMODATION for (3) Latched Rocker Switches, (1) PTO Switch, (2) Generic Switches to Control (3) 30 amp relays, with Programmable Interlocks, for Body Builder Hook up in the Engine Compartment Left Side, Recommended for Automatic Transmissions	0/0	0
7382135439	(2) TIRE, FRONT 11R22.5 Load Range H HSR 3 (CONTINENTAL), 494 rev/mile, 75 MPH, All-Position	78/0	78
7382135444	(4) TIRE, REAR 11R22.5 Load Range H HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive	0/168	168
Services Section:			
40129	WARRANTY Standard for MV Series, Effective with Vehicles Built July 1, 2017 or Later, CTS-2020A	0/0	0
40YZL	SRV CONT, EXT CUMMINS ENG/AFTR To 60-Month/100,000 Miles (160,000 km), Extended Cummins L9 Engine Coverage, Protection Plan 1 and Aftertreatment, (Truck Application Only)	0/0	0
Total Component Weight:		7168/4397 (lbs)	11565 (lbs)
		(lbs)	(lbs)

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.

APPROVED BY: _____


DATE: _____

MAINTAINER CORPORATION OF IOWA, INC.

WEIGHT DISTRIBUTION ESTIMATE

PURPOSE: ESTIMATE THE WEIGHT DISTRIBUTION OF THE PROPOSED UNIT
 BASED UPON THE FOLLOWING CHASSIS AND BED SPECIFICATIONS,
 WITH TANKS FULL, EVAC EMPTY AND NO TOOLS OR ADDITIONAL PAYLOAD

Chassis make / model	INTL MV607	WGMH / DEKALB
Wheel base (WB) in inches	191	June 5, 2025
Cab to axle (CA or CT) in inches	123 CA	DEKALB-7
Body type	2TL	

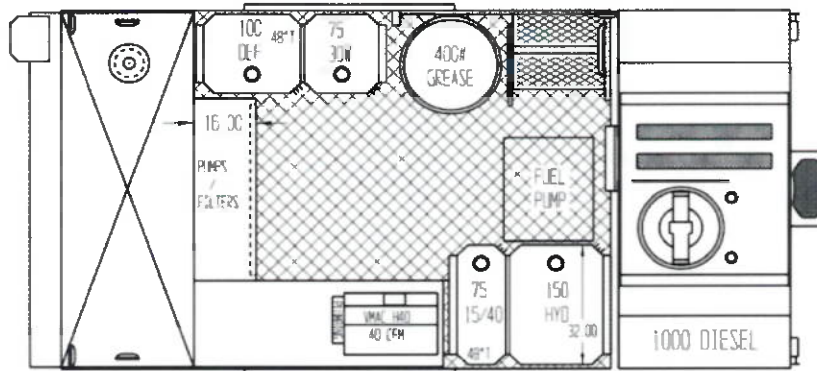

	FRONT (lbs)	REAR (lbs)	TOTALS (lbs)
Chassis Curb Weights (Includes driver)	7,368	4,417	11,785
Weight of body (product tanks loaded)	4,795	15,802	20,597
TOTALS	12,163	20,219	32,382
percentage of weight	38%	62%	

NOTES
****CHECK ROAD LIMITS****

CHASSIS GVWR	13,000	23,000	36,000
LEFTOVER PAYLOAD	837	2,781	3,618

Miscellaneous items included in estimate (lbs)

Chassis fuel & DEF	360
H40	250
Misc Item	
Misc Item	
Misc Item	

Special Notes:

- 1) **Weight estimations shown above can vary by +/- 4%**
- 2) Most states allow only 20,000 lbs for single rear axle, check specific state limits
- 3) Most states allow only 34,000 lbs for tandem rear axle, check specific state limits
- 4) Multi-leaf or air suspensions are recommended / consult factory for approval of other suspension types
- 5) Centerline of gravity based on totals shown above (including chassis) is 119.26 inches behind front axle

Q15221-1

WEST GEORGIA MOBILE HYDRAULICS, INC.

98 EDGE ROAD
PO BOX 266
VILLA RICA, GA 30180
(PHONE) 770-459-2998
(FAX) 770-459-2956
www.wgmbhinc.com

Quote Date:

Expiration Date:

Salesperson: Mickey Casey



Quote To Deal r:

End User:

Contact Information:

West Georgia Mobile Hydraulics

Dekalb County

Name:

Mickey Casey

Phone:

Account Number:001104

Email:

Account Number: 018557

Notes:

Body Type: 2TL-OVAL

The body configuration below is based on these chassis selections (Chassis is not included): International MV/ Durastar (4300, 4400) W/ 33,000 GVW, 4X2, Diesel, Allison 3000 Transmission, Single Rear Axle

Body Specifications Selected: Material: Steel, Bed Length: 9', Total Lube Products: 6

Cost Variance Modifier (CVM), meaning that if high-inflation is incurred from our vendors-suppliers from the time of order to our unit build, we will have no choice but to requote prior to unit production; if multi-orders units are spread-out pricing could vary depending on timing.

Delivery of service body units and lube units (installed on chassis or ship-out body) are to be arranged by either the selling dealer or end use customer; Maintainer does not arrange shipping of complete units

Chassis Disclaimer: All information and quote pricing shown with this proposal is based on a design utilizing the chassis make and model and the specific features and options of the chassis as noted above. If any changes are made to the chassis type or options the proposal must be updated as they could change available unit features and options along with quote pricing. Any changes made without updating the quote will void this proposal.

Ex-factory estimated delivery: 270-390 days after receipt of order with full order information subject to prior sales and chassis availability.

Config # C44621

----- Maintainer Body -----

- (9) Steel lube body per foot, multi-leaf or air suspension recommended, other suspension types may void or limit the warranty, consult factory for details.
- Install charge to mount lube body on chassis
- Access steps recessed into the street side bed with a side access single door (full height). Includes grab handles for 3-point contact & (1) 12V LED light for illumination, D-ring latch and device to hold door open at 180° (steps & handles painted safety yellow).
- Permanent "pocket style" storage compartment built flush with outside of bed. Includes access to valve of adjacent tank and protective spray coating.
- Permanent step built flush on outside of bed for access to above-deck compartments. NOTE: Includes paint or protective spray to match wheel well layout.
- (9) ~1/8" cargo floor (deck plate)

--- Chassis Equipment & Accessories ---

- Camera, back up, 7" color monitor, external mount camera with infrared. Note: monitor mounted to windshield (not on dash).
- Engine speed control, computer set.
- 2.5 lb. ABC fire extinguisher and hazard reflectors.
- Back up alarm, 97 dB at 1 meter.
- Relocate chassis batteries using existing cable length.
- Add additional air leveling valve for chassis w/air suspension.

----- Hydraulic Power Package -----

- Open center hydraulic power package with high pressure filter. NOTE: The open center hydraulic system allows operation of only a single hydraulic component at a time. Multi-component operation requires a tandem open center system or a closed center system and is not available on some chassis configurations. Contact factory for details.
- PTO for Allison or PACCAR TX-8 automatic transmission.
- Open center hydraulic system pump (Chelsea), includes pressure reducer.
- Oil reservoir, 8 gallons, steel, high efficiency.
- (8) Standard hydraulic oil (per gallon). Oil good for -25° F startup and 9° F to 187° F operating temperature.
- ~Hydraulic cooling package, high efficiency bar/plate design, low-medium GPM flow rating Includes a high temperature switch with indicator light (5-20 GPM)
- No reservoir heater was selected.

----- Air Compressor Equipment & Accessories -----

- ~VMAC H40, open center, rotary screw, hydraulic driven air compressor w/black cover. 40 CFM @ 150 PSI with integral hydraulic oil cooler. Includes control panel, mounted near body's switch panel & Hydraulic Soft Start. Note: hydraulic requirement = 14 GPM (may require large pump kit, not included). Cold weather package included (cooler bypass), additional oil warming valve available (open center only), 24"L x 16.5"W x 18"H, 162 Lbs.
- Cold weather package (oil warming valve) for VMAC H40 air compressors (open center only).
- Air accessory package - 1/2" X 50', spring rewind reel, hose & ball stop.

Q15221-1

- 1/2" filter, regulator and lubricator (FRL).
- Mounting brackets for air compressor.
- Air tank, 17 gallon, pressure rating of 200 PSI with 16" diameter. Includes moisture drain, painted black.

-----Inverter & Jump Start-----

--- Product #1---OFFROAD---

- 1000 Gallon Oval Tank, 8D Design, (96" wide, 44" long, primed only). Equipped with: sump, aluminum access ladder (painted yellow), manhole fill & baffles. Aluminum under-tank compartments. 3 flush mounted sight glass fluid level indicators (non-compliant to DOT 406 requirements).
- Recessed pocket in fuel tank (2" NPT), includes label for product type quick-fill coupler, not included.
- EVO2 fuel commercial shearing pump, 5-30 GPM.
- ~Filter, fuel w/water separator (#012796). Dual spin-on elements up to 50 GPM. Includes service filter indicator light. Compatible with gasoline.
- Hannay 1-1/4" x 50' electric rewind reel, 40-50 GPM.
- Fuel dispenser with 1-1/4" inlet (024340) w/straight hose swivel (026381), up to 50 GPM.
- Meter, Fuel, 1-50 GPM (compatible with gasoline)

--- Product #2---HYDRAULICOIL---

- 150 gallon ALUMINUM tank, 8D design, equipped with filtered fill cap, suction screen, sight gauge, shut-off valve on tank suction line, installed/spring mounted w/rubber pad.
- Level indicator, tube style sight gauge for 8D product tank or oval tank (NON-DOT only).
- Recessed pocket in 8D product tank (3/4" NPT) includes label for product type, quick-fill coupler not included.
- Tank venting/overflow @ 2 PSI check for tank quick fill system.
- ~Hydra Kit - Oil, Turolla pump (small displacement). Up to 7 GPM delivery w/hydraulic, 10W or 20W @ 60 degrees F. Up to 4 GPM delivery w/30W, 50W or 90W @ 60 degrees F.
- ~HP filter 6 micron with indicator light for hydraulic & 10W oils (filter #012006 & element #012007). NOTE: Filter kit includes a remote mounted red indicator light with label.
- ~Hannay 1/2" X 50' spring reel with rollers.
- 1/2" Samson digital, metered, flexible, non-drip dispenser.

--- Product #3---15/40OIL---

- 75 gallon ALUMINUM tank, 8D design, equipped with filtered fill cap, suction screen, sight gauge, shut-off valve on tank suction line, installed/spring mounted w/rubber pad.
- Level indicator, tube style sight gauge for 8D product tank or oval tank (NON-DOT only).
- Recessed pocket in 8D product tank (3/4" NPT) includes label for product type, quick-fill coupler not included.
- Tank venting/overflow @ 2 PSI check for tank quick fill system.
- ~Hydra Kit - Oil, Turolla pump (small displacement). Up to 7 GPM delivery w/hydraulic, 10W or 20W @ 60 degrees F. Up to 4 GPM delivery w/30W, 50W or 90W @ 60 degrees F.
- ~HP filter 20 micron with indicator light for 10W/30, 20W, 15W/40, 30W, 40W, 60W, engine oil and ATF oils (filter #011986 & element #011987). NOTE: Filter kit includes a remote mounted red indicator light with label.
- ~Hannay 1/2" X 50' spring reel with rollers.
- 1/2" Samson digital, metered, flexible, non-drip dispenser.

--- Product #4---DEF---

Q15221-1

- 100 gallon STAINLESS steel tank, 8D design, equipped with filtered fill cap, suction screen, sight gauge, shut-off valve on tank suction line, additional 2" fitting (plugged) for future use, installed/spring mounted w/rubber pad.
- ~DEF (corrosion resistant) Wilden P1 diaphragm pump (026509) 0-9.5 GPM delivery, Includes control valve, regulator, and 12-Volt / air type purge system
- ~Filter, DEF, housing #019507 (1-micron element #019508).
- ~Piusi 3/4" x 50' spring rewind reel 022231 (corrosion resistant) with rollers.
- 3/4" SS DEF Graco Dispenser W/ Swivel

--- Product #5---30WTOIL---

- 75 gallon ALUMINUM tank, 8D design, equipped with filtered fill cap, suction screen, sight gauge, shut-off valve on tank suction line, installed/spring mounted w/rubber pad.
- Level indicator, tube style sight gauge for 8D product tank or oval tank (NON-DOT only).
- Recessed pocket in 8D product tank (3/4" NPT) includes label for product type, quick-fill coupler not included.
- Tank venting/overflow @ 2 PSI check for tank quick fill system.
- ~Hydra Kit - Oil, Turolla pump (small displacement). Up to 7 GPM delivery w/hydraulic, 10W or 20W @ 60 degrees F. Up to 4 GPM delivery w/30W, 50W or 90W @ 60 degrees F.
- ~HP filter 20 micron with indicator light for 10W/30, 20W, 15W/40, 30W, 40W, 60W, engine oil and ATF oils (filter #011986 & element #011987). NOTE: Filter kit includes a remote mounted red indicator light with label.
- ~Hannay 1/2" X 50' spring reel with rollers.
- 1/2" Samson digital, metered, flexible, non-drip dispenser.

--- Product #6---GREASE---

- Temporary shipping stand for 400# grease kit (drum not included).
- Graco 50:1 Grease Pump For 400# Drum; Includes: control valve, regulator & oiler, drum cover, follow plate & tie down
- ~Grease Hannay 3/8" x 50' Spring Rewind Reel
- 3/8" Samson high pressure grease dispenser w/swivel.

----- Lube Equipment & Accessories -----

- ***Any tank 120 gallons or larger that contains combustible liquids (such as diesel fuel) or any unit with an aggregate rated capacity of 1,000 gallons or more is required by law to have 4 hazard placards.***
- ***Lube kit GPM delivery: each lube kit max flow will be determined by the component with the lowest flow rating.
- Four hazard placard flip triangles, installed - required with any tank 120 gallons or greater for combustible liquid.
- Emergency fuel shut off, air operated, dual controllers w/fusible link, switch and indicator. Recommended for 200 gallon and larger fuel tanks. Required on DOT 406 tanks. NOTE: Decals for DOT406 tank shut offs require lettering at least 3/4" tall. NOTE: Includes hose between tank tops if tank is teed to 2nd tank with same product. Utilizes chassis air system where applicable, units without chassis air systems will require an auxiliary air source.

Street Side Under Oval Tank Compartment #1

- Strip light, 12V, LED.
- Shelf, aluminum, adjustable, compartment (250 Lbs. capacity), installed.

Curb Side Under Oval Tank Compartment #1

- Strip light, 12V, LED.
- Shelf, aluminum, adjustable, compartment (250 Lbs. capacity), installed.

Curb Side Under Oval Tank Compartment #2

- Strip light, 12V, LED.
- Shelf, aluminum, adjustable, compartment (250 Lbs. capacity), installed.

Above Curb Side Compartment #1

- Galvannealed above body storage compartment.
- Strip light, 12V, LED.
- Shelf, aluminum, adjustable, compartment (250 Lbs. capacity), installed.

Above Curb Side Compartment #2

- Galvannealed above body storage compartment.
- Strip light, 12V, LED.
- (2) Shelf, aluminum, adjustable, compartment (250 Lbs. capacity), installed.

Below Curb Side Compartment #1

- Galvannealed below body storage compartment.
- Strip light, 12V, LED.

----- Rear Reel Compartment & Accessories -----

- Galvannealed rear reel compartment, 34" deep with aluminum roll-up access door. Includes interior switch panel, 1 heavy duty fixed shelf and a separate pump/filter compartment. Rear bumper not included.
- (3) Strip light, 12V, LED.

----- Compartment Equipment & Accessories -----

- Pressurized storage system (PSS): 2 blowers with filters.

----- Lighting / Electrical Equipment & Accessories -----

- Base electrical components for Lube Body - Includes Wiring Harnesses, Switch Panel with fuses for Non CAN System
- (6) Flood light, 12V, LED, 2,400 lumens (022232).
- ~Mini light bar, amber with clear lens with on/off switch in cab, Maxxima M20488YCL-D (#029442).
- Light bar mounting plate, includes wire loom holders.
- Strobe lightheads, LED, oval, amber, recessed, 6.5" x 2.25" (pair).
- Grote FMVSS 108 LED lighting/reflector kit: includes (2) oval S/T/T/R, (2) oval S/T/T, (5) red 3/4" marker and (2) amber 3/4" marker lights.

----- Rear Bumper & Accessories -----

- Lube body step bumper, steel, bolt-on, 8" step with smooth top. Note: does not include bolt-on steps.

----- Painting Equipment & Accessories -----

- International reference paint code: 9219 White (PPG Code: 90604NC).
- (15.5) Feet of unit painted urethane "White" color. Not a base coat/clear coat or Metallic
- (11.833) Feet of primer.
- (15.5) Feet of splatter coating on interior of compartments.
- (15.5) Feet of undercoat.
- PSC- Level 30 •Compartment Fronts •Bottoms of Door Frames •Outside area of Wheel Wells •Bumper Sides & Step (face & top) •Center Deck Floor •Lower interior and HD shelving of reel compartment
- Install customer supplied company name decal.

----- Miscellaneous Equipment & Accessories -----

- Parts and service manual (online & condensed paper version).
- Install customer supplied mud flaps. NOTE: 1-Ton flap = 14"T x 20"W, 2-Ton flap = 16"T x 24"W.

---Rear Reel Compartment Dualock---

Config # C44622 Design Style: (4) Drawer Set #028093 (18" Wide)

Housing Dimensions: 22.75" Tall, 18" Wide, 26" Deep

Top Shelf is Standard, Drawers Listed from Top to Bottom

Drawer #	Height	Dividers
Drawer 1	3"	Adjustable
Drawer 2	3"	Adjustable
Drawer 3	4"	Adjustable
Drawer 4	4"	Adjustable

BOTTOM SPACE: 6.0 Inches Tall

---Notes---

LIMITED AVAILABLE PAYLOAD: end user needs to acknowledge limited payload with this configuration, and that Maintainer Corp. is not responsible if customer overloads capacity.

Maintainer Terms and Conditions

- All prices are FOB Sheldon, IA and in USD. Delivery of service and lube units are the dealer / end user's responsibility. This quote does not include any applicable local, state or (F.E.T.) federal taxes. Payment in full is required on delivery unless other terms are agreed upon prior to sale.
- Orders that are cancelled after booking will be subject to a \$500 cancellation processing fee, in addition to any restocking or costs for parts purchased for the cancelled unit. The fee will cover our incurred costs to process the order, plan production and released purchasing commitments. Orders are considered firm upon chassis confirmation, units are committed to a build slot, and serial numbers are assigned.
- Changes to booked orders are subject to change order fees. We have historically allowed flexibility on rearranging your build order prior to week 10, if the swap is without changes to either spec. Units already released for production (weeks 8-10) will be reviewed on a case-by-case basis, but generally it is too late. It is possible they could be reassigned to the offline upfit department and you can get a quote for the changes.
- Maintainer reserves the right to make changes and/or substitute components and product is subject to change without notice. Maintainer is not responsible for any Local, State, Federal or other regulations that may be pertinent to quote order.
- The information contained in this quote, and all supporting documentation is confidential and may only be used by Maintainer, our dealer and/or the customer listed on this quote.
- We assume no liability for damage due to theft, vandalism, fire, weather, disaster, or damage due to gradual deterioration or inherent defect in such property.
- We assume no liability for damage any kind during the storage of your chassis or parts on our premises while awaiting modification or installation. The storage location of the property shall be determined by Maintainer in its discretion.
- Exception to above is when directly attributable to our own gross negligence in moving or modifying chassis or parts, and in that event only to the extent of the wholesale used value of the chassis or parts as of the date of storage.

Please note that we have included estimated freight in this quote. Once the unit ships, we will have actual freight. Please contact us with questions or concerns. Thank you for giving us the opportunity to be of service to you.

Sincerely,

Mickey Casey
President
West Georgia Mobile Hydraulics, Inc.