



Atlanta GA
 2560 Moreland Avenue SE
 Atlanta, GA 30315
 (404) 622-1921

Customer Proposal Letter

DeKalb County Georgia Department of Purchasing and Contracting
 1300 Commerce Drive
 Decatur, 30030
 (404) 297-3280

Tommy, thank you for the opportunity to earn your business. We look forward to working with you on your business needs. Please accept the following proposal.

VEHICLE

Make: International Model HV607 Year 2025 Stock Number To Be Determined

Additional Vehicle and Accessories Description

To be delivered on or about 2024

New 2025 International HV607 tandem chassis with 16ft dump body mounted and delivered to Dekalb.
 This price includes the DOAS Fee.
 State of Georgia Contract # 99999-SPD-SPD0000155-0001

Quantity	1	Total
Truck Price per Unit	\$ 241,377.00	\$ 241,377.00
Georgia State Contract Discount	-9,500.00	-9,500.00
Net Sales Price	\$231,877.00	\$231,877.00
Optional Extended Warranty		
State Sales Tax		
Documentary Fee		
Administration Fee		
Vehicle Inventory Tax		
Additional Taxes		
Tire Recycling Program		
Battery Disposal Fee		
Out of State Vehicle Fee		
Rebate(s)		
Total Sales Price (Including Rebate(s))	\$ 231,877.00	\$ 231,877.00
Trade Allowance (see DISCLAIMER Below)		\$0.00

Sales Representative

Kurt Hohlstein

Purchaser

signature

printed name

signature

printed name

Accepted by Sales Manager or General Manager

title

date

signature

printed name

Kurt Hohlstein
 3/28/2023

Quote good until

Note: The above Customer Proposal is a quotation only. Sale terms subject to approval of Sales Manager of Dealer.

DISCLAIMER: Any order based on this Proposal subject to Customer executing Dealer's standard form Retail Purchase Order incorporating above terms. Any documentary fees, state tax, title, registration and license fees subject to adjustment and change. Actual F.E.T. to be paid by Dealer, subject to adjustment. Any F.E.T. variance will be responsibility of Dealer. Manufacturer has reserved the right to change the price to Dealer of any vehicle not currently in Dealer's stock, without notice to Dealer. If Quoted Vehicle(s) not currently in Dealer's stock, Dealer reserves right to change Quotation Total to reflect any price increases from Manufacturer. This Proposal is based upon Dealer's current and expected inventory, which is subject to change. Dealer not obligated to retain any specific vehicles in stock, nor maintain any specific inventory level. Dealer shall not be obligated to fulfill Proposal in event quoted vehicle(s) not in stock or available within requested delivery schedule at time Proposal accepted. Dealer shall not be liable for any delay in providing or inability to provide Quoted Vehicle(s), where such inability or delay is due, in whole or in part, to any cause beyond the reasonable control of Dealer or is without the gross negligence or intended misconduct of Dealer. Above listed Trade Value based upon current appraisal of Trade Vehicle(s). Dealer may adjust Trade Value of Trade Vehicle(s) to reflect changes in condition and/or mileage of Trade Vehicle(s) between date of current appraisal and acceptance of this Proposal by Customer.


Prepared For:

~~W.A. BORGERS~~
~~Jeffrey~~
~~200 Piedmont Ave. SE Ste 216~~
~~Atlanta GA 30334~~
~~(404) 622-0582~~
~~Refer to ID 21~~

Presented By:

RUSH TRUCK CENTERS OF GA
Kurt Hohlstein
2560 MORELAND AVE SE
ATLANTA GA 30315 -
(404)622-1921

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

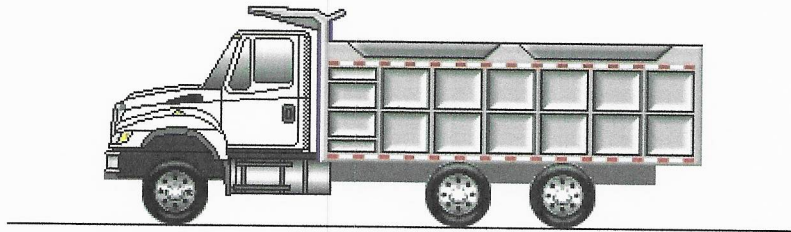

Model Profile
2025 HV607 SBA (HV607)

AXLE CONFIG:	6X4
APPLICATION:	Construction Dump
MISSION:	Requested GVWR: 66000. Calc. GVWR: 66000. Calc. GCWR: 80000 Calc. Start / Grade Ability: 28.40% / 2.26% @ 55 MPH Calc. Geared Speed: 72.7 MPH
DIMENSION:	Wheelbase: 171.00, CA: 103.90, Axle to Frame: 75.00
ENGINE, DIESEL:	{Cummins L9 380} EPA 2021, 380HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 380 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 5.38
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
FRAME REINFORCEMENT:	Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL
PAINT:	Cab schematic 100WL Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
HV60700	Base Chassis, Model HV607 SBA with 171.00 Wheelbase, 103.90 CA, and 75.00 Axle to Frame.	6136/3644	9780
1586	TOW LOOP, FRONT	85/0	85
1AND	AXLE CONFIGURATION {Navistar} 6x4	155/112	267
	<u>Notes</u> : Pricing may change if axle configuration is changed.		
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL	-15/198	183
1GBP	FRAME REINFORCEMENT Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL	357/547	904
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty	0/0	0
1MEJ	FRAME DIMPLE Dimple on Left and Right Top Flange of Frame Rail to Reference Rear Axle Centerline	0/0	0
1UAN	FRAME EXTENSION, FRONT Integral; 27" In Front of Grille, with Outer C-Channel Reinforcement	207/-32	175
1WGX	WHEELBASE RANGE 169" (430cm) Through and Including 219" (555cm)	172/-172	0
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity	186/0	186
3AGA	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers	58/0	58
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications	0/0	0
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6		
4619	TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck	2/0	2
	<u>Notes</u> : When electronic stability control is ordered with trailer connections on a 4x2 truck, please check the operator manual for trailer weight restrictions.		
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System	0/0	0
4EBS	AIR DRYER {Bendix AD-9} with Heater	17/11	28
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake	0/14	14
4EXV	BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 SqIn	4/0	4
4GBM	BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake	1/0	1

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
4LAA	SLACK ADJUSTERS, FRONT {Haldex} Automatic	14/0	14
4LGA	SLACK ADJUSTERS, REAR {Haldex} Automatic	0/32	32
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM	0/0	0
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab	13/8	21
4VKK	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Back of Cab, Perpendicular to Rail	-15/21	6
4WBX	DUST SHIELDS, FRONT BRAKE for Air Cam Brakes	10/0	10
4WDA	DRAIN VALVE (3) Petcocks, for Air Tanks	0/0	0
4WDM	DUST SHIELDS, REAR BRAKE for Air Cam Brakes	0/20	20
4WDU	HAND CONTROL VALVE, AIR for Trailer Brakes, Omit Item	0/0	0
4WDW	BRAKE CHAMBERS, POSITION on Rear/Rear Axle Located Inside Rear Tire Envelope (Meets Asphalt Spreader/Paver Clearance Requirements)	0/0	0
4XDR	BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle	0/104	104
4XDT	BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity	33/0	33
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type	0/30	30
5710	STEERING COLUMN Tilting and Telescoping	17/2	19
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black	0/0	0
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power	103/-7	96
6DGT	DRIVELINE SYSTEM {Dana Spicer} SPL170 Main Driveline with SPL170 Interaxle Shaft, for 6x4	8/30	38
7BEV	AFTERTREATMENT COVER Steel, Black	10/3	13
7BLW	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab	133/44	177
7WAZ	TAIL PIPE (1) Turnback Type	6/4	10
7WDM	EXHAUST HEIGHT 10'	16/12	28
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum	9/7	16
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment	0/0	0

Includes

- : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
- : HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
- : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
- : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
- : STARTER SWITCH Electric, Key Operated
- : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
- : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
- : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
- : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
	: WIRING, CHASSIS Color Coded and Continuously Numbered		
8518	CIGAR LIGHTER Includes Ash Cup	1/0	1
8718	POWER SOURCE Cigar Type Receptacle without Plug and Cord	1/0	1
8GXJ	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount	0/0	0
8HAB	BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/ Turn	2/0	2
8HAH	ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket	0/2	2
8MJV	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (4) 12-Volt 3800CCA Total, Top Threaded Stud	63/71	134
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors	5/0	5
8RPP	ANTENNA Shark Fin, Roof Mounted	1/0	1
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input	3/0	3
8THJ	AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications	2/0	2
8TKK	TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/ Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch	1/0	1
8VAY	HORN, ELECTRIC Disc Style	0/0	0
8VUJ	BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab	-36/13	-23
8WCK	POWER SOURCE, TERMINAL TYPE 2-Post	1/0	1
8WGD	SOLENOID, AIR for Customer Use; Provides (4) Normally Closed Pilot Air Source, Approx. 4 CFM, Includes Latched Switch in Cab; Air Available Only with Key in "Ignition" or "Accessory" Position; Air Will Exhaust with Key in "Off" Position	3/0	3
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade	0/0	0
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights	0/0	0
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on	0/0	0
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm	0/0	0
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened	0/0	0
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start	10/0	10
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender	0/0	0
8XHD	BATTERY DISCONNECT SWITCH 300 Amp, Disconnects Charging Circuits, Locks with Padlock, Cab Mounted	2/0	2
8XHN	HORN, AIR Single Trumpet, Black, with Lanyard Pull Cord	3/0	3
8XKZ	USB PORT (2) Located in the Instrument Panel	0/0	0
8XNY	HEADLIGHTS Halogen	0/0	0
9585	FENDER EXTENSIONS Rubber	6/0	6
9AAB	LOGOS EXTERIOR Model Badges	0/0	0
9AAE	LOGOS EXTERIOR, ENGINE Badges	0/0	0
9HBM	GRILLE Stationary, Chrome	0/0	0
9HBN	INSULATION, SPLASH PANELS for Sound Abatement	2/0	2
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV	0/0	0
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100	0/0	0
	<u>Includes</u> : PAINT SCHEMATIC ID LETTERS "WL"		
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone	0/0	0
10AGB	COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360	1/0	1
10WWP	MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension, for Tire Size 425/445	3/0	3
11001	CLUTCH Omit Item (Clutch & Control)	0/0	0
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection	0/0	0
12849	BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines	3/0	3
	<u>Includes</u> : BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door		
12926	RADIATOR HOSES Silicone; Molded	0/0	0
12ESS	ENGINE, DIESEL {Cummins L9 380} EPA 2021, 380HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 380 Peak HP (Max)	585/-21	564
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed	0/0	0
	<u>Includes</u> : FAN Nylon		
12UYH	RADIATOR Aluminum, Cross Flow, Front to Back System, 1469 SqIn, with 1172 SqIn Charge Air Cooler	-49/2	-47
	<u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber		

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
12VBC	AIR CLEANER Single Element	0/0	0
12VJH	EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2023	0/0	0
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel	0/0	0
12WZE	CARB IDLE COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations	0/0	0
12XBM	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines	0/0	0
12XCS	CARB EMISSION WARR COMPLIANCE Federal, Does Not Comply with CARB Emission Warranty	0/0	0
13BEK	TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway	496/146	642
13WAW	OIL COOLER, TRANSMISSION {Modine} Water to Oil Type	25/0	25
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission	1/0	1
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints	0/0	0
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223	0/0	0
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released	0/0	0
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming	0/0	0
13XAA	PTO CONTROL, DASH MOUNTED For Customer Provided PTO; Includes Switch, Electric/Air Solenoid, Piping and Wiring	3/0	3
13XAN	PTO LOCATION Customer Does Not Intend to Install PTO	0/0	0
14GRP	AXLE, REAR, TANDEM {Meritor RT-46-160} Single Reduction, 46,000-lb Capacity, Driver Controlled Locking Differential in Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 5.38	0/2596	2596
14UMX	SUSPENSION, REAR, TANDEM {Hendrickson HMX EX 460} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings	0/628	628
14WCR	TRANSVERSE TORQUE RODS {Hendrickson} TRAAX Rod, Transverse Only	0/-8	-8
15DYP	DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab	14/3	17
15LNS	FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine	-1/-4	-5
15SJR	FUEL TANK Top Draw, Non-Polished Aluminum, 26" Dia, 100 US Gal (379L), Mounted Left Side, Under Cab	40/31	71
16030	CAB Conventional, Day Cab	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u>	<u>Tot Wt</u>
		(lbs)	(lbs)
16975	HEATER HOSES Silicone	0/0	0
16BAM	AIR CONDITIONER with Integral Heater and Defroster	0/0	0
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer <u>Includes</u> : GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/ Refill for : GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure : WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)	0/0	0
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow	0/0	0
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission	1/0	1
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel	2/0	2
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster	0/0	0
16JNT	SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust	0/0	0
16SEA	MIRROR, CONVEX, HOOD MOUNTED {Lang Mekra} (1) Right Side, Bright, 7.5" Sq.	6/0	6
16SGH	GRAB HANDLE, EXTERIOR (2) Chrome, for Cab Entry, (1) Towel Bar Type, with Anti-Slip Rubber Inserts Mounted Left Side at B-Pillar, (1) Towel Bar Type Mounted Right Side on Vertical Exhaust	4/2	6
16SMN	SEAT, PASSENGER {National} Non Suspension, High Back, Fixed Back, Integral Headrest, Vinyl	15/8	23
16SNR	MIRRORS (2) C-Loop, Power Adjust, Heated, LED Clearance Lights, Bright Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width <u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"	0/0	0
16VCC	SEAT BELT All Orange; 1 to 3	0/0	0
16VHX	CAB MOUNTING HEIGHT EFFECTS High Cab in Lieu of Mid High Cab Mounting (Approx. 4.5")	0/0	0
16VKB	CAB INTERIOR TRIM Classic, for Day Cab <u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap	0/0	0

<u>Code</u>	<u>Description</u>	<u>F/R Wt</u> (lbs)	<u>Tot Wt</u> (lbs)
16VLV	MONITOR, TIRE PRESSURE Omit	-10/-1	-11
16WBY	ARM REST, RIGHT, DRIVER SEAT	3/0	3
16WHJ	HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type	0/0	0
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature	0/0	0
16WSK	CAB REAR SUSPENSION Air Bag Type	0/0	0
16XJN	INSTRUMENT PANEL Flat Panel	0/0	0
16XRX	MODESTY PANEL Painted	0/0	0
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab	0/0	0
27DPN	WHEELS, FRONT {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc	62/0	62
28DUL	WHEELS, REAR {Accuride 29300} DUAL DISC: 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs	0/288	288
29WLK	WHEEL BEARING, FRONT, LUBE {EmGard FE-75W-90} Synthetic Oil	0/0	0
60AAG	BDY INTG, REMOTE POWER MODULE Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs, Max 20 amp per Channel, Max 80 amp Total; Includes 1 Switch Pack with Latched Switches	0/0	0
60AJK	BDY INTG, INDICATOR LIGHTS (2) 1 for Body Up, 1 for Gate Open, Includes Audible Alarm, Programmable Mode for Various Switch Actions. (Requires 2 Remote Power Module Inputs)	0/0	0
7792545437	(2) TIRE, FRONT 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position	62/0	62
7792545438	(8) TIRE, REAR 315/80R22.5 Load Range L HSC 3 (CONTINENTAL), 481 rev/mile, 68 MPH, All-Position	0/280	280
Services Section:			
40128	WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A	0/0	0
40VHS	SRV CONTRACT, EXT CMS ENG/AFTR {Cummins} To 60-Month/100,000 Miles (160,000 km), Extended Cummins L9 Engine Coverage, Protection Plan 1 and Aftertreatment, (Truck Application Only)	0/0	0
Total Component Weight:		9058/8668 (lbs)	17726 (lbs)

The weight calculations included in this proposal are an estimate of future vehicle weight. The actual weight as manufactured may be different from the estimated weight. Navistar, Inc. shall not be liable for any consequences resulting from any differences between the estimated weight of a vehicle and the actual weight.



K & K Manufacturing, Inc.
 70 Pike Industrial Way
 Milner, GA 30257

Snow Plow Setup
Estimate

Date	Estimate #
3/24/2023	22539

Name / Address
Rush Truck Center - Atlanta 2560 Moreland Ave. Atlanta, GA 30315

Additional Info
Kurt Hohlstein DeKalb County Dump with Plow Swap

Rep	P.O. No.	Approx Lead Time	Terms	Make / Model	C/A & SRW-DRW
BRAD			Net 30	INT	104CT,DRW

Description	Qty	LBS	Cost	Total
Godwin 450T13/42G BODY 450T 13 X 42 SIDES 10GA SLICK SIDE WITH 10" I-BEAM MAIN RUNNER G63110D P23 HOIST HYVA 63110 DIRECT P23 187-50BDY-13/42 50 SERIES BDY 3/16HT UPG 13/42 1/4ARFL-50BB/13 FLOOR AR1/4 - 450/550 13FT OAKSIDEBD13 OAK SIDE BOARD 13' (STD 6- 8") CPCONT4-500/F CAB PROTECTOR FULL BIG BODY INSTALLCP INSTALL CAB PROTECTOR LIGHTHOLE LIGHT HOLES IN CP, RA, RCP CAB PROTECTOR - (2) FACE AND (2) SIDES FOR STROBES AC4-500BOLT ASPHALT CHUTE 4 & 500 BOLT ON INSTALLAC INSTALL ASPHALT CHUTE LIGHTHOLE LIGHT HOLES IN CP, RA, RCP REAR APRON - (4) ROUND FOR STOP TAIL TURN AND BACKUP HAS HIDE A STEP HIDE A STEPS, HANDLES AND BODY STEPS ON BOTH SIDES AT FRONT OF BODY HANDLES OUTSIDE HANDLES ON DUMP BODY OUTSIDESTEPS OUTSIDE STEPS ON DUMP BODY INSIDESTEPS INSIDE STEPS ON DUMP BODY GRIPSTRUT-14 WALK ROD GRIP STRUT 14 LIGHTHOLE LIGHT HOLES IN CP, RA, RCP REAR CORNER POSTS - (2) SIDES OF CORNER POSTS FOR STROBES AND (4) REAR CORNER POSTS FOR STROBES AND STOP TAIL TURN P1801945 TARP SYSTEM FLASH 30 DEGREE (N AIR HI LIFT TG TAILGATE AIR HIGH LIFT WITH D RING AT TOP OF TAILGATE FOR EASY REMOVAL	1			

Phone #	Fax #	E-mail	Web Site	Subtotal
770-228-9974	770-228-7573	sales@kandkmfg.com	www.kandkmfg.com	Sales Tax (0.0%)
				Total

Estimates are valid for 7 days unless otherwise noted.



K & K Manufacturing, Inc.
 70 Pike Industrial Way
 Milner, GA 30257

Estimate

Date	Estimate #
3/24/2023	22539

Name / Address
Rush Truck Center - Atlanta 2560 Moreland Ave. Atlanta, GA 30315

Additional Info
Kurt Hohlstein DeKalb County Dump with Plow Swap

Rep	P.O. No.	Approx Lead Time	Terms	Make / Model	C/A & SRW-DRW
BRAD			Net 30	INT	104CT,DRW

Description	Qty	LBS	Cost	Total
TGINVERTV TAILGATE INVERTED "V" DIRT SHEDDING INVERTED V ON TOP OF TAILGATE TGSLP TAILGATE SLOPING 6" SLOPE OTHERPAINTBB ZINC PRIME & COLOR POWDER COAT PAINTED WHITE INSTANDEMFB INSTALL TANDEM FULL BLOWN HYDR INSPH20 HITCH PINTLE HOOK RIGID PH20 INSREINFFB INSTALL FRONT BUMPER REINFORCE INSFRTMUDSTL MUD GUARD STEEL FRONT INSGLADHAND GLAD HANDS PC18424 LICENSE PLATE BRACKET GLOVE INSAHLT LABOR TO INSTALL AIR HIGH INS4PIN INSTALL 4-PIN ELECTRIC PLUG INS6PIN INSTALL 6-PIN ELECTRIC PLUG INS7PINRND INSTALL 7-PIN ELECT PLUG ROUND INSSEALEDHARN INSTALL SEALED WIRING HARNESS EBC ELECTRIC BRAKE CONTROL WIRED TO 6 PIN PLUG PLOWLIGHTKIT PLOW LIGHTS, BRACKET, HARNESS INSSTT INSTALL STT AND BACK-UP LED OVAL STT IN RCP WITH STROBE, ROUND STT/BU IN APRON 97DB BUALARM 97db BACK UP ALARM - STANDARD INS8HEAD INSTALL 4-HEAD FLASHING LED (2) FACE OF CAB PROTECTOR, (2) SIDES OF CAB PROTECTOR, (2) SIDES OF REAR CORNER POSTS, (2) REAR CORNER POST PTOMUNCIE PTO MUNCIE HOT SHIFT				

Phone #	Fax #	E-mail	Web Site	Subtotal
770-228-9974	770-228-7573	sales@kandkmfg.com	www.kandkmfg.com	Sales Tax (0.0%)
				Total

Estimates are valid for 7 days unless otherwise noted.